

Power Off Activated Type Electromagnetic Brake Motors 60 W (1/12 HP) Frame Size: □ 3.54 in. (□ 90 mm)



World **K** Series
(Gearhead Sold Separately)



V Series / Combination Type
(Pre-assembled Gearmotor)



Specifications

Motor Specifications

World K Series (General Purpose)

Model	Rating	Output Power		Voltage	Frequency	Current	Starting Torque		Rated Torque		Rated Speed	Capacitor
		HP	W				oz-in	mN·m	oz-in	mN·m		
(TP) 5RK60GU-AWMU 5RK60A-AWMU	30 minutes	1/12	60	Single-Phase 110	60	1.24	53	380	57	405	1450	20
				Single-Phase 115								
(TP) 5RK60GU-CWME 5RK60A-CWME	30 minutes	1/12	60	Single-Phase 220	50	0.67	66	470	69	490	1200	5
				Single-Phase 230								
				Single-Phase 230								
(TP) 5IK60GU-SWM 5IK60A-SWM	Continuous	1/12	60	Three-Phase 200	50	0.50	85	600	63	450	1300	—
				Three-Phase 200								
				Three-Phase 220								
				Three-Phase 230								

(TP) Contains a built-in thermal protector. If a motor overheats for any reason, the thermal protector is opened and the motor stops. When the motor temperature drops, the thermal protector closes and the motor restarts. Be sure to turn the motor off before inspecting.

- This type of motor does not contain a built-in simple brake mechanism.
- The "U" and "E" at the end of the model name indicate that the unit includes a capacitor. These two letters are not listed on the motor nameplate.
- When the motor is approved under various safety standards, the model name on the nameplate is the approved model name. → Page G-11

Details of Safety Standards → Page G-2



V Series (Quiet Operation, High Strength, Long Life)

Model	Rating	Output Power		Voltage	Frequency	Current	Starting Torque		Rated Torque		Rated Speed	Capacitor
		HP	W				oz-in	mN·m	oz-in	mN·m		
(TP) VHR560AM-□U	30 minutes	1/12	60	Single-Phase 110	60	1.24	53	380	57	405	1450	20
				Single-Phase 115								
(TP) VHR560CM-□E	30 minutes	1/12	60	Single-Phase 220	50	0.67	66	470	69	490	1200	5
				Single-Phase 230								
				Single-Phase 230								
(TP) VHI560SM-□	Continuous	1/12	60	Three-Phase 200	50	0.50	85	600	63	450	1300	—
				Three-Phase 200								
				Three-Phase 220								
				Three-Phase 230								

(TP) Contains a built-in thermal protector. If a motor overheats for any reason, the thermal protector is opened and the motor stops. When the motor temperature drops, the thermal protector closes and the motor restarts. Be sure to turn the motor off before inspecting.

- This type of motor does not contain a built-in simple brake mechanism.
- The "U" and "E" at the end of the model name indicate that the unit includes a capacitor. These two letters are not listed on the motor nameplate.
- When the motor is approved under various safety standards, the model name on the nameplate is the approved model name. → Page G-12

Details of Safety Standards → Page G-2

- Models above are provided as combination type with motor and gearhead pre-assembled.
- Enter the gear ratio in the box (□) within the model name.
- The values in the table are for the motor only.

Electromagnetic Brake (Power Off Activated Type) Specifications

World K Series

Model	Voltage	Frequency	Current	Input	Holding	Brake	Torque
	VAC	Hz	A	W	oz-in	mN·m	
5RK60GU-AWMU 5RK60A-AWMU	Single-Phase 110	60	0.13	10	71	500	
	Single-Phase 115						
5RK60GU-CWME 5RK60A-CWME	Single-Phase 220	50	0.07	10	71	500	
	Single-Phase 230						
	Single-Phase 230						
5IK60GU-SWM 5IK60A-SWM	Single-Phase 200	60	0.07	10	71	500	
	Single-Phase 200						
	Single-Phase 220						
	Single-Phase 230						

V Series

Model	Voltage	Frequency	Current	Input	Holding	Brake	Torque
	VAC	Hz	A	W	oz-in	mN·m	
VHR560AM-□U	Single-Phase 110	60	0.13	10	71	500	
	Single-Phase 115						
VHR560CM-□E	Single-Phase 220	50	0.07	10	71	500	
	Single-Phase 230						
	Single-Phase 230						
VHI560SM-□	Single-Phase 200	60	0.07	10	71	500	
	Single-Phase 200						
	Single-Phase 220						
	Single-Phase 230						

The values in the table are for the motor only.

■ Gearheads for World K Series (Sold Separately)

● Parallel Shaft

Gearhead Model	Gear Ratio
5GU□KA	3~180
5GU10XKB (Decimal Gearhead)	

- Enter the gear ratio in the box (□) within the model name.

● Right-Angle

Type	Gearhead Model	Gear Ratio
Hollow Shaft	5GU□RH	3.6~180
Solid Shaft	5GU□RAA	3~180

- Enter the gear ratio in the box (□) within the model name.
- Right-Angle Gearheads → Page A-189

■ Gearmotor — Torque Table

● World K Series (General Purpose)

The maximum permissible torque with a decimal gearhead with a gear ratio of 10:1 is 177 lb-in (20 N-m).

◆ Single-Phase 115/230 VAC 60 Hz, Three-Phase 230 VAC 60 Hz

Unit = Upper values: lb-in/Lower values: N-m

Model	Speed r/min	Gear Ratio																			
		600	500	360	300	240	200	144	120	100	72	60	50	36	30	24	20	18	15	12	10
5RK60GU-AWMU 5RK60GU-CWME / 5GU□KA	8.6 0.98	10.6 1.2	14.1 1.6	17.7 2.0	22 2.5	26 3.0	32 3.7	38 4.4	46 5.3	59 6.7	70 8.0	84 9.6	118 13.4	141 16	158 17.9	177 20	177 20	177 20	177 20	177 20	177 20
5IK60GU-SWM / 5GU□KA	8.1 0.92	9.7 1.1	13.2 1.5	15.9 1.8	20 2.3	24 2.8	30 3.5	37 4.2	44 5	55 6.3	66 7.5	79 9.0	110 12.5	132 15	148 16.8	177 20	177 20	177 20	177 20	177 20	177 20

◆ Single-Phase 230 VAC 50 Hz

Unit = Upper values: lb-in/Lower values: N-m

Model	Speed r/min	Gear Ratio																			
		500	416	300	250	200	166	120	100	83	60	50	41	30	25	20	16	15	12.5	10	8.3
5RK60GU-CWME / 5GU□KA	10.6 1.2	12.3 1.4	17.7 2	21 2.4	26 3	31 3.6	39 4.5	47 5.4	56 6.4	71 8.1	85 9.7	102 11.6	143 16.2	171 19.4	177 20						

● V Series (Quiet Operation, High Strength, Long Life)

◆ Single-Phase 115/230 VAC 60 Hz, Three-Phase 230 VAC 60 Hz

Unit = Upper values: lb-in/Lower values: N-m

Model	Speed r/min	Gear Ratio										
		360	300	200	120	100	60	50	30	20	15	10
VHR560AM-□U VHR560CM-□E	15.9 1.8	19.4 2.2	29 3.3	48 5.5	58 6.6	92 10.4	110 12.5	184 20.9	260 30	260 30	260 30	260 30
VHI560SM-□	15 1.7	18.5 2.1	27 3.1	45 5.1	54 6.2	86 9.8	104 11.8	173 19.6	260 29.4	260 30	260 30	260 30

◆ Single-Phase 230 VAC 50 Hz

Unit = Upper values: lb-in/Lower values: N-m

Model	Speed r/min	Gear Ratio										
		300	250	166	100	83	50	41	25	16	12.5	8.3
VHR560CM-□E	19.4 2.2	23 2.6	35 4	58 6.6	69 7.9	111 12.6	134 15.2	220 25.3	260 30	260 30	260 30	260 30

- Gearheads and decimal gearheads are sold separately. Decimal gearheads are not available for **V** Series.
- Enter the gear ratio in the box (□) within the model name. A colored background indicates gear shaft rotation in the same direction as the motor shaft; a white background indicates rotation in the opposite direction.
- The speed is calculated by dividing the motor's synchronous speed (50 Hz: 1500 r/min, 60 Hz: 1800 r/min) by the gear ratio. The actual speed is 2~20% less than the displayed value, depending on the size of the load.

■ Gearmotor — Torque Table when Right-Angle Gearhead is Attached

Right-Angle Gearheads are available for the World **K** Series only.

→ Page A-196

■ Permissible Overhung Load and Permissible Thrust Load

Motor (Round shaft motor) → Page A-11


Gearhead → Page A-11

■ Permissible Load Inertia J for Gearhead


→ Page A-12

Starting and Braking Characteristics Common to 60W Type (Reference Values)

Single-Phase Motor

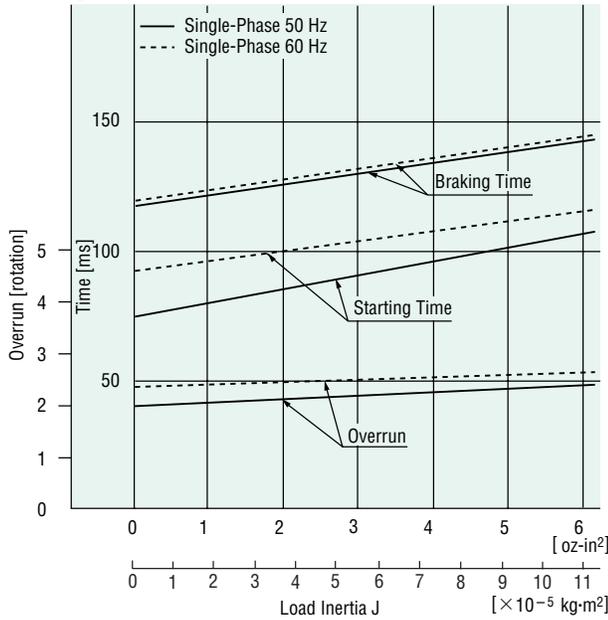

Three-Phase Motor

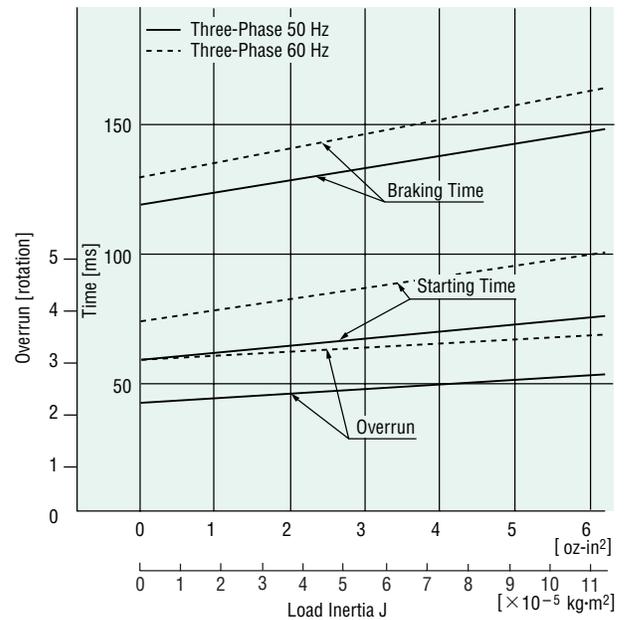

Dimensions Scale 1/4, Unit = inch (mm)

Mounting screws are included with gearheads. Dimensions for screws → A-223

World K Series

Lead Wire Type

Motor
5RK60GU-AWMU
5RK60GU-CWME
5IK60GU-SWM
Weight: 7.5 lb. (3.4 kg)


Gearhead
5GU□KA
Weight: 3.3 lb. (1.5 kg)

DXF A090U (5GU3KA~180KA)

Round Shaft Type

5RK60A-AWMU
5RK60A-CWME
5IK60A-SWM
Weight: 7.5 lb. (3.4 kg)


DXF A350

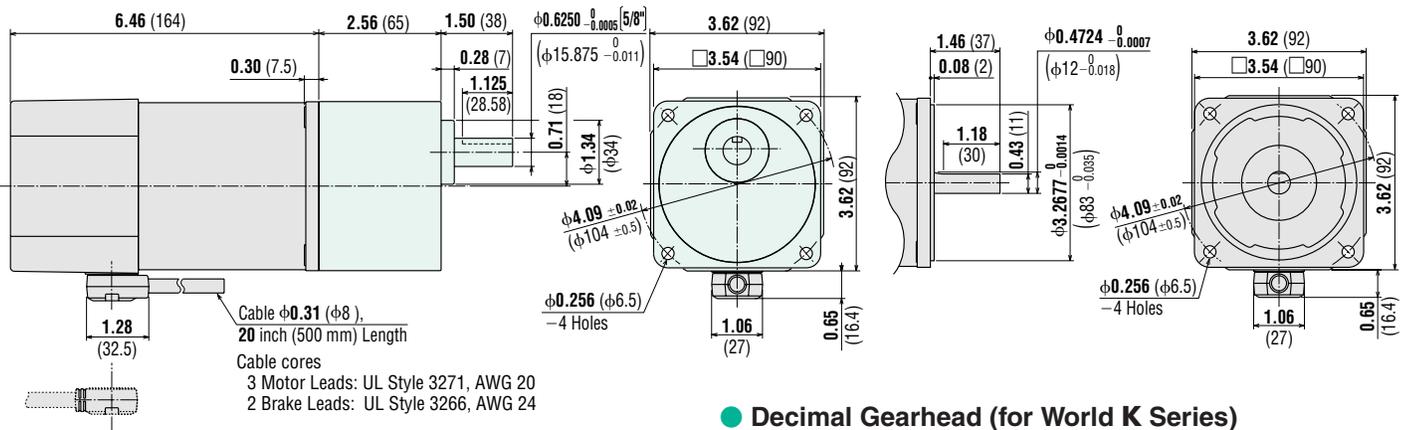

Cable direction can be switched to the opposite direction.

Key and Key Slot (Scale 1/2)


(The key is included with the gearhead)

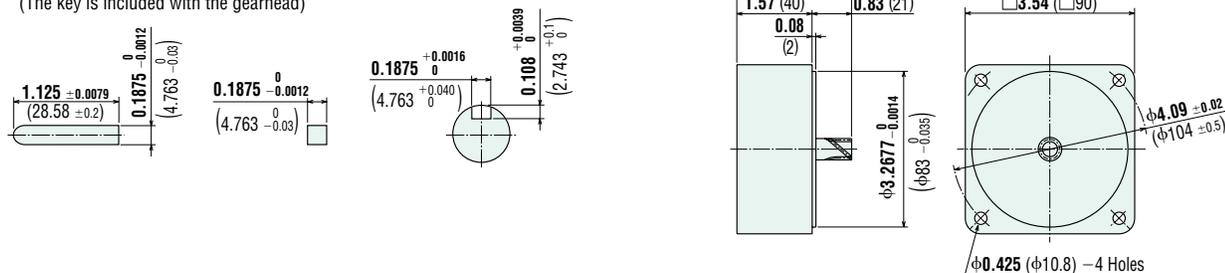

Decimal Gearhead (for World K Series)

5GU10XKB Weight: 1.3 lb. (0.6 kg)

DXF A029

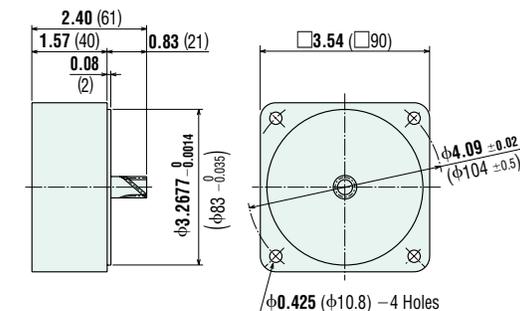

● **V Series**


VHR560AM-□U, VHR560CM-□E, VHI560SM-□ (Combination Type)

Weight: 11 lb. (4.9 kg) including gearhead

Motor Model: VHR560AM-GVH, VHR560CM-GVH, VHI560SM-GVH

Gearhead Model: GVH5G□

- DXF A246A (GVH5G5~18)
- A246B (GVH5G30~90)
- A246C (GVH5G120~300)

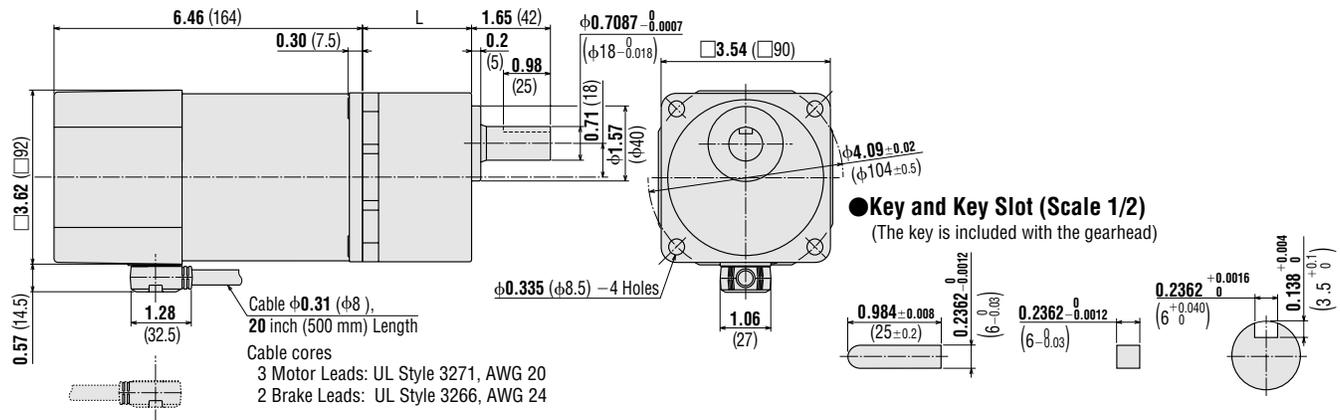


● **Key and Key Slot (Scale 1/2)**
(The key is included with the gearhead)

Cable direction can be switched to the opposite direction.

- GVH5G5-GVH5G18: L = 1.77 (45)
- GVH5G30-GVH5G90: L = 2.28 (58)
- GVH5G120-GVH5G300: L = 2.52 (64)

● **Capacitor** (included with single-phase motors)

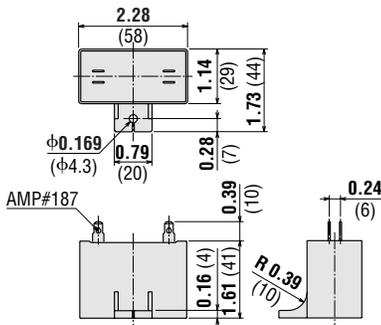


Motor Model	Capacitor Model	Weight oz. (g)
5RK60GU-AWMU		
5RK60A-AWMU	CH200CAUL	3.4 (95)
VHR560AM-□U		
5RK60GU-CWME		
5RK60A-CWME	CH50BFAUL	3.0 (85)
VHR560CM-□E		

● If you need to order a capacitor without a motor, add "-C" to the capacitor model name shown.
A capacitor cap is included with a capacitor.

Connection Diagrams

Single-Phase Motor

5RK60GU-AWMU
5RK60GU-CWME
VHR560AM-□U
VHR560CM-□U

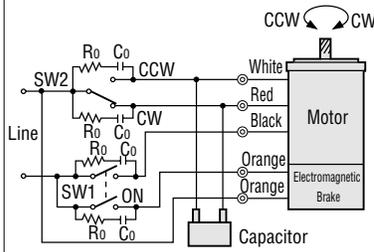

SW1 operates both motor and electromagnetic brake action. The motor will rotate when SW1 is switched simultaneously to ON (short circuit). When SW1 is switched simultaneously to OFF (open), the motor stops immediately with the electromagnetic brake and holds the load.
(To release the brake while the motor is stopped, apply voltage between the two brake lead wires (orange).)


Direction of Rotation

To rotate the motor in a clockwise (CW) direction, flip SW2 to CW.
To rotate the motor in a counterclockwise (CCW) direction, flip SW2 to CCW.

Switch No.	Specifications		Note
	Single-Phase 110 VAC Input Single-Phase 115 VAC Input	Single-Phase 220 VAC Input Single-Phase 230 VAC Input	
SW1	125 VAC 5 A minimum (Inductive Load)	250 VAC 5 A minimum (Inductive Load)	Switched Simultaneously
SW2			—

Three-Phase Motor

5IK60GU-SWM
VHI560SM-□

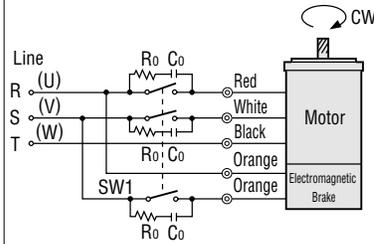

SW1 operates both motor and electromagnetic brake action. The motor will rotate when SW1 is switched simultaneously to ON (short circuit). When SW1 is switched simultaneously to OFF (open), the motor stops immediately with the electromagnetic brake and holds the load.
(To release the brake while the motor is stopped, apply voltage between the two brake lead wires (orange).)

Direction of Rotation


To rotate the motor in a counterclockwise direction, change any two connections between U, V and W.

Switch No.	Specifications	Note
SW1	250 VAC 5 A minimum (Inductive Load)	Switched Simultaneously

- The direction of motor rotation is as viewed from the shaft end of the motor.
- CW represents the clockwise direction, while CCW represents the counterclockwise direction.
- Connection diagrams are also valid for the equivalent round shaft motors.
- Ro and Co indicates surge absorber circuit. [Ro = 5~200Ω, Co = 0.1~0.2μF, 200WV (400WV)]
EPCR1201-2 is available as an optional surge absorber. →Page A-218
- **How to connect a capacitor** →Page A-225

Inner Connection Diagram for 4-Terminal Capacitor

Terminals of the capacitor are connected as shown in the figure. For lead wire connection, use one lead wire per terminal.



List of Motor and Gearhead Combinations for V Series

Model numbers for motor and gearhead combinations are shown below.

Model	Motor Model	Gearhead Model
VHR560AM-□U	VHR560AM-GVH	GVH5G□
VHR560CM-□E	VHR560CM-GVH	
VHI560SM-□	VHI560SM-GVH	

- Enter the gear ratio in the box (□) within the model name.