

Servo Motors

AZX Series

Battery-Free Mechanical Absolute Encoder Equipped Motor


Standard Type / PS Geared Type 400 W (1/2 HP), 600 W (4/5 HP)

These servo motors are equipped with a battery-free absolute encoder. They are suitable for positioning applications with a large amount of travel, since they achieve high torque in the high speed range. The basic operations are the same as the **AZ** Series, making combined use in equipment easy.



Battery-Free Absolute Encoder Equipped Servo Motor

The **AZX** Series is equipped with the same battery-free mechanical absolute encoder (ABZO sensor) as the **AZ** Series. These are dedicated servo motors for positioning and continuous operation.

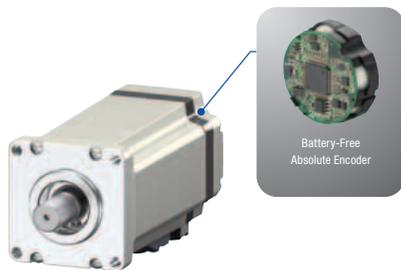

- **Mechanical-Type Encoder**
Holds positioning information even when powered off
- **Multi-Turn Absolute Encoder**
Absolute position detection is possible with ± 900 rotations (1800 rotations) of the motor shaft from the reference home position
- For details about the advantages, please see the Oriental Motor website.

● No External Sensors Required

Thanks to the absolute system, a home sensor or external sensor is not required.

Advantages

- High-Speed Return-to-Home + Improved Return-to-Home Accuracy
- Reduced Cost
- Simple Wiring
- Not Affected by External Sensor Malfunctions

● Battery-Free


No battery is necessary for a mechanical-type encoder. Positioning information is managed mechanically by the ABZO sensor.

Advantages

- No Battery Replacement Required
- No Battery Installation Space Required (Unlimited driver installation possibilities)
- Safe for Overseas Shipping

Network Compatible Drivers


These drivers are EtherCAT and EtherNet/IP-compatible. The host control device and driver are connected with one communication cable, reducing wiring.

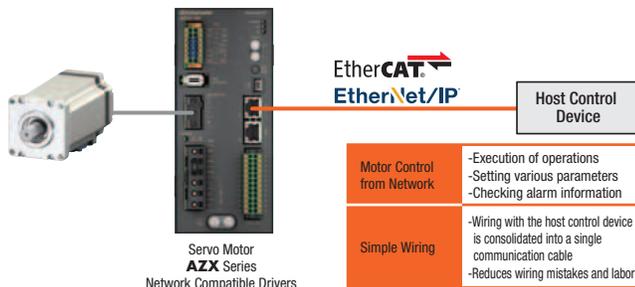

Sequence Function Simplifies Programming*

AZX Series positioning operations come with a variety of sequence functions, such as a timer setting between operations and linked operation, conditional branching, and loop counting. These can be set using the support software **MEXE02**, which helps simplify the host controller's sequence program.

*Only EtherNet/IP-compatible drivers.

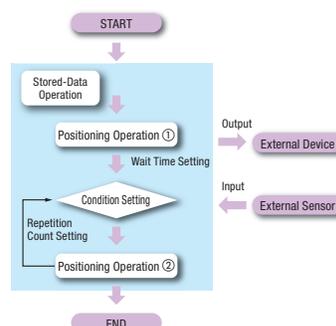


- Positioning Operation Data Setting (Max. 256 points)
- General-Purpose I/O Signal Counts (Input 6, output 6)
- Communication I/O Signal Counts (Input 16, output 16)

Achieves High Torque in the High Speed Range


The **AZX** Series achieves high torque in the high speed range.

It is suitable for positioning applications with a large amount of travel (e.g.: ball screw driving).

Standard Type

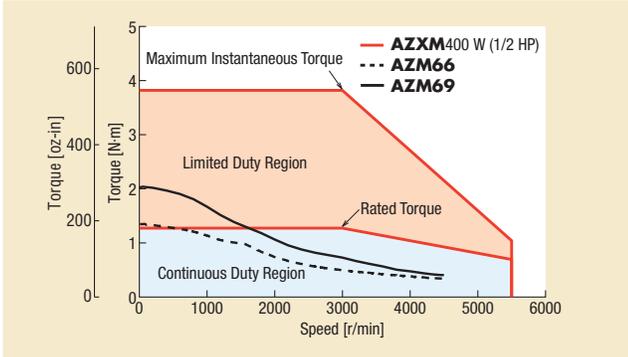

PS Geared Type

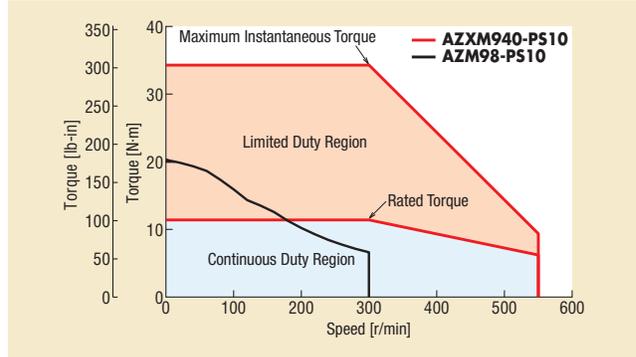


● This is a comparison of the speed – torque characteristics of the **AZX** Series and **AZ** Series.

The **AZX** Series offers superior torque in the high speed range, the **AZ** Series is better in the low speed range.

The Basic Operations are the Same as the AZ Series

Using the **AZX** Series and **AZ** Series together in the same equipment can eliminate the work of operational changes.

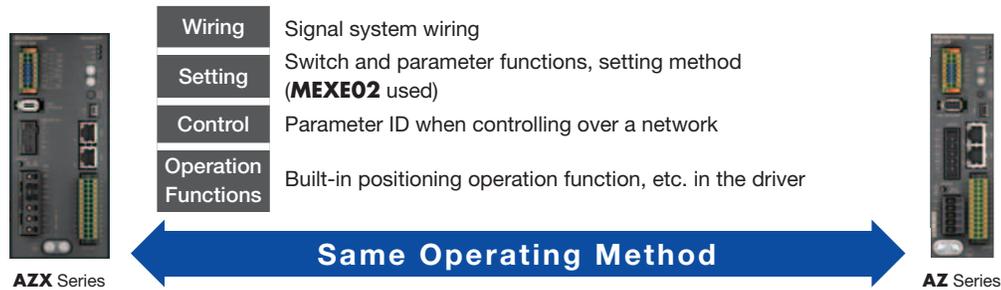

Product Line

Motors, drivers, and cables must be ordered individually.

| Motor | | | Driver | Cables | |
|---|-------------------|----------------------|--|---|---------------------------------|
| Type | Output Power | Frame Size | | Cable Type | Cable Length |
| Standard Standard Type with Electromagnetic Brake  | 400 W (1/2 HP) | 60 mm (2.36 in.) |  NEW EtherCAT EtherNet/IP Single-Phase/ Three-Phase 200-240 VAC | Connection Cable Sets  | 1 to 20 m (3.28 to 65.6 ft.) |
| | 600 W (4/5 HP) | 85 mm (3.35 in.) | | | |
| PS Geared PS Geared Type with Electromagnetic Brake -Gear Ratio 5 10 25  | 400 W (1/2 HP) | 90 mm (3.54 in.) | | Flexible Connection Cable Sets  | |
| | 600 W (4/5 HP) | 90 mm (3.54 in.)* | | | |

● EtherCAT-compatible drivers have passed the official EtherCAT conformance test.

● EtherCAT® is a patented technology licensed from Beckhoff Automation GmbH (Germany) and is a registered trademark of that company.

● EtherNet/IP™ is a trademark of ODVA.


*Gear ratio 5 only

System Configuration

Combination of Standard Type Motor with Electromagnetic Brake and Network Compatible Driver

An example of a configuration using I/O control or EtherNet/IP with an EtherNet/IP compatible driver is shown below. Motors, drivers, and connection cable sets / flexible connection cable sets must be ordered individually.

- Required for Operation
- Optional Accessory

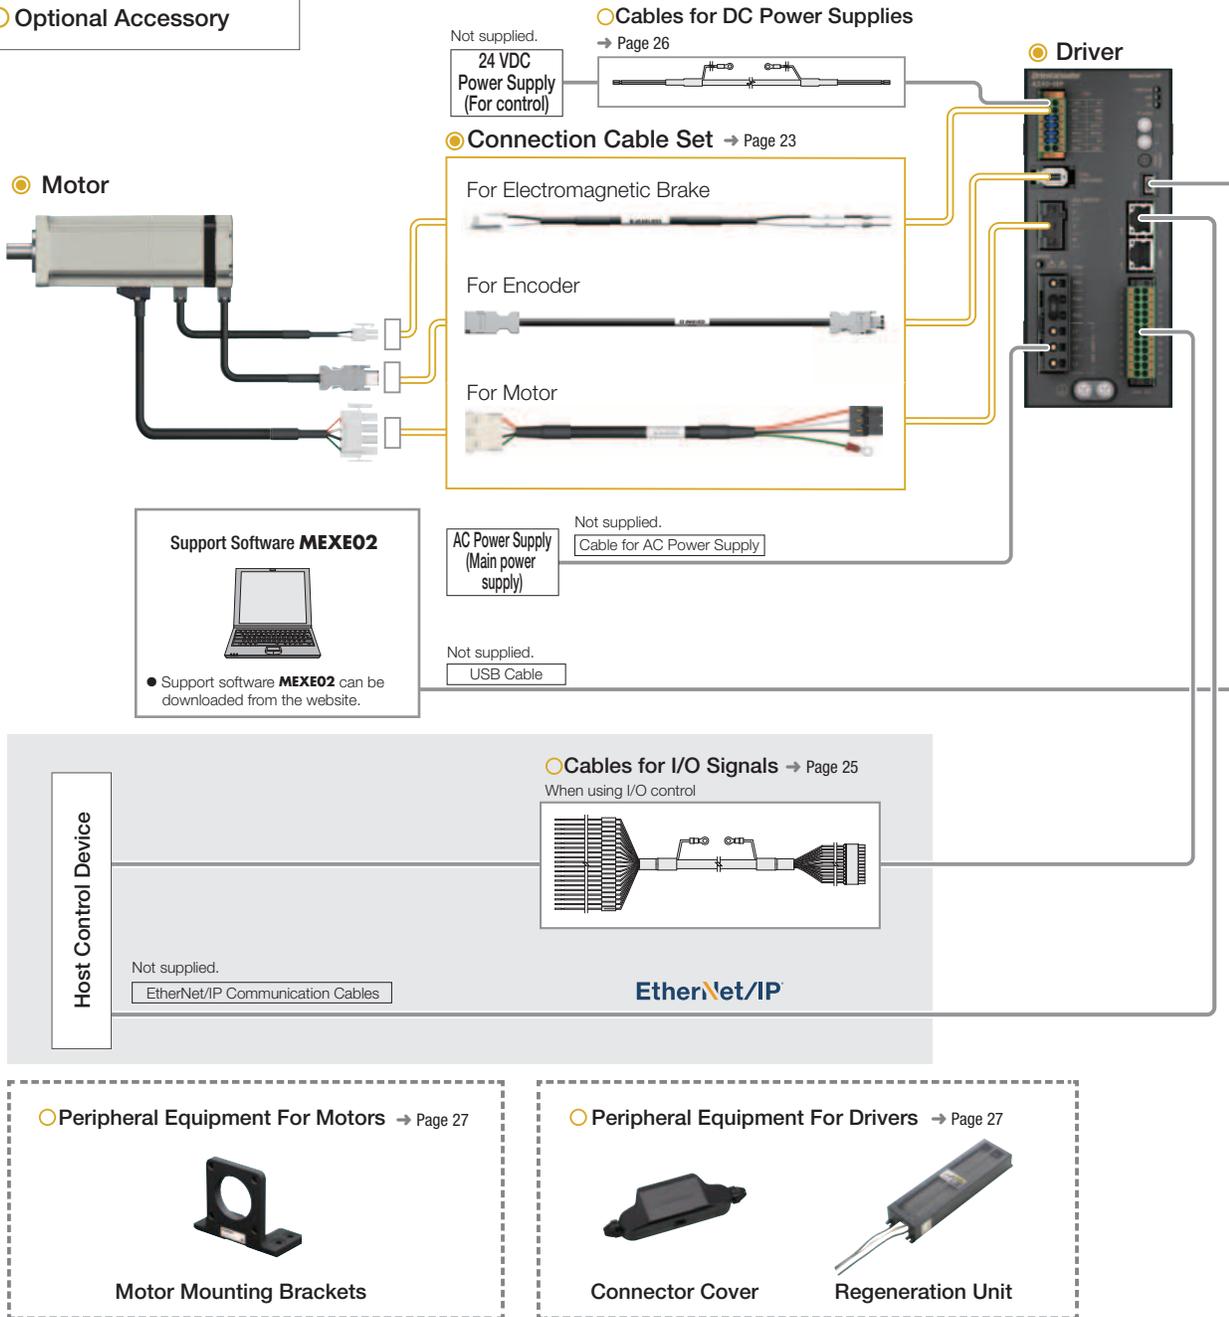

Example of System Configuration



● The system configuration shown above is an example. Other combinations are also available.

Note

● The motor cable and electromagnetic brake cable from the motor cannot be connected directly to the driver. When connecting to a driver, use a connection cable.

Product Number

● Motor

◇ Standard Type

AZXM 6 40 A C

①

②

③

④

⑤

◇ PS Geared Type

AZXM 9 40 A C-PS 10

①

②

③

④

⑤

⑥

⑦

● Driver

AZXD-S EP

①

②

③

● Connection Cable Sets / Flexible Connection Cable Sets

CC 010 V X F B

①

②

③

④

⑤

⑥

| | | |
|---|-------------------|---|
| ① | Motor Type | AZXM: AZX Series Motor |
| ② | Motor Frame Size | 6: 60 mm (2.36 in.) 9: 85 mm (3.35 in.) |
| ③ | Output Power | 40: 400 W (1/2 HP) 60: 600 W (4/5 HP) |
| ④ | Output Shaft Type | A: Single Shaft M: Type with Electromagnetic Brake |
| ⑤ | Motor Type | C: AC Input Specification |

| | | |
|---|-------------------|---|
| ① | Motor Type | AZXM: AZX Series Motor |
| ② | Motor Frame Size | 9: 90 mm (3.54 in.) |
| ③ | Output Power | 40: 400 W (1/2 HP) 60: 600 W (4/5 HP) |
| ④ | Output Shaft Type | A: Single Shaft M: Type with Electromagnetic Brake |
| ⑤ | Motor Type | C: AC Input Specification |
| ⑥ | Geared Type | PS: PS Geared Type |
| ⑦ | Gear Ratio | |

| | | |
|---|--------------------|---|
| ① | Driver Type | AZXD: AZX Series Driver |
| ② | Power Supply Input | S: Single-Phase/Three-Phase 200-240 VAC |
| ③ | Product Line | ED: EtherCAT-Compatible EP: EtherNet/IP-Compatible |

| | | |
|---|------------------|---|
| ① | | CC: Cable |
| ② | Length | 010: 1 m (3.28 ft.) 020: 2 m (6.56 ft.) 030: 3 m (9.84 ft.) 050: 5 m (16.4 ft.) 070: 7 m (22.9 ft.) 100: 10 m (32.8 ft.) 150: 15 m (49.2 ft.) 200: 20 m (65.6 ft.) |
| ③ | Reference Number | |
| ④ | Applicable Model | X: For AZX Series |
| ⑤ | Cable Type | F: Connection Cable Set R: Flexible Connection Cable Set |
| ⑥ | Description | Blank: For Type without Electromagnetic Brake B: For Type with Electromagnetic Brake |

Product Line

Motors, drivers, and connection cables must be ordered individually.

Motor

◇ Standard Type



| Frame Size | Output Power | Product Name |
|------------------|----------------|------------------|
| 60 mm (2.36 in.) | 400 W (1/2 HP) | AZXM640AC |
| 85 mm (3.35 in.) | 600 W (4/5 HP) | AZXM960AC |

◇ Standard Type with an Electromagnetic Brake



| Frame Size | Output Power | Product Name |
|------------------|----------------|------------------|
| 60 mm (2.36 in.) | 400 W (1/2 HP) | AZXM640MC |
| 85 mm (3.35 in.) | 600 W (4/5 HP) | AZXM960MC |

◇ PS Geared Type



| Frame Size | Output Power | Product Name |
|------------------|----------------|-----------------------|
| 90 mm (3.54 in.) | 400 W (1/2 HP) | AZXM940AC-PS5 |
| | | AZXM940AC-PS10 |
| | | AZXM940AC-PS25 |
| | 600 W (4/5 HP) | AZXM960AC-PS5 |

◇ PS Geared Type with Electromagnetic Brake



| Frame Size | Output Power | Product Name |
|------------------|----------------|-----------------------|
| 90 mm (3.54 in.) | 400 W (1/2 HP) | AZXM940MC-PS5 |
| | | AZXM940MC-PS10 |
| | | AZXM940MC-PS25 |
| | 600 W (4/5 HP) | AZXM960MC-PS5 |

Driver

◇ EtherCAT-Compatible NEW



| Power Supply Input | Product Name |
|--------------------------------------|-----------------|
| Single-Phase/Three-Phase 200-240 VAC | AZXD-SED |

◇ EtherNet/IP-Compatible



| Power Supply Input | Product Name |
|--------------------------------------|-----------------|
| Single-Phase/Three-Phase 200-240 VAC | AZXD-SEP |

Connection Cable Sets / Flexible Connection Cable Sets

Use the flexible connection cable set in applications where the cable is bent and flexed.

Extension cable sets and flexible extension cable sets are also available.

Refer to page 22.

Included Items

Motor

| Type | Included Items | Parallel Key |
|-----------------------|----------------|--------------|
| Standard Type | | - |
| PS Geared Type | | 1 piece |

Driver

| Type | Included Items | Connector |
|------------------------|----------------|-----------------------------------|
| EtherCAT-Compatible | | -For CN1 (1 piece) |
| EtherNet/IP-Compatible | | -For CN4 (1 piece) |
| | | -For CN7 (1 piece) |
| | | -Connector wiring lever (1 piece) |

List of Combinations

| Product | Type | Product Name |
|---------|-----------------------|-------------------------------------|
| Motor | Standard Type | AZXM640■C, AZXM960■C |
| | PS Geared Type | AZXM940■C-PS□, AZXM960■C-PS5 |

+

| Product | Type | Product Name |
|---------|------------------------|-----------------|
| Driver | EtherCAT-Compatible | AZXD-SED |
| | EtherNet/IP-Compatible | AZXD-SEP |

+

| Product | Type | Product Name |
|--|--------------------------------|---|
| Connection Cable Sets / Flexible Connection Cable Sets | Connection Cable Set | For Motor / Encoder: CC◇◇◇VXF For Motor / Encoder / Electromagnetic Brake: CC◇◇◇VXFB |
| | Flexible Connection Cable Sets | For Motor / Encoder: CC◇◇◇VXR For Motor / Encoder / Electromagnetic Brake: CC◇◇◇VXRB |

● A letter or number indicating the following is specified where the box is located in the product name.

■: Output Shaft Shape

□: Gear Ratio

◇: Cable Length

How to Read Specifications

| Motor Product Name | Single Shaft | AZXM640AC | AZXM940AC-PS5 |
|--------------------------------|--|--|--|
| | With Electromagnetic Brake | AZXM640MC | AZXM940MC-PS5 |
| Driver Product Name | | AZXD-5□ | |
| ① Rated Output Power | W (HP) | 400 (1/2) | 400 (1/2) |
| ② Rated Speed | r/min | 3000 | - |
| ③ Max. Speed | r/min | 5500 | - |
| ④ Rated Torque | N·m (lb-in) | 1.27 (11.2) | 5.72 (50) |
| ⑤ Maximum Instantaneous Torque | N·m (lb-in) | 3.82 (34) | 17.1 (151) |
| ⑥ Permissible Speed Range | r/min | - | 0~1100 |
| ⑦ Rotor Inertia | J: kg·m ² (oz-in ²) | 0.294 × 10 ⁻⁴ (1.61) [0.316 × 10 ⁻⁴ (1.73)] | 0.294 × 10 ⁻⁴ (1.61) [0.316 × 10 ⁻⁴ (1.73)] |
| ⑧ Inertia | J: kg·m ² (lb-in ²) | - | 0.163 × 10 ⁻⁴ (0.056) |
| ⑨ Permissible Load Inertia | J: kg·m ² (lb-in ²) | 14.7 × 10 ⁻⁴ (5.0) | 0.037 (126) |
| ⑩ Gear Ratio | | 5 | 5 |
| ⑪ Resolution | P/R | 100~10000 (Factory setting 1000) | 500~50000 (Factory setting 5000) |
| Detector | | Mechanical Multi-Turn Absolute Encoder | |
| ⑫ Backlash | arcmin | 1 Turn: 16 bit Multi-Turn: ±900 rotations (1800 rotations) | 15 |
| ⑬ Power Supply Input | Main Power Supply | Input Voltage | Single-Phase/Three-Phase 200-240 VAC -15~+6% 50/60 Hz |
| | | Rated Current | Single-Phase: 5.3 Three-Phase: 3.0 |
| | Control Power Supply | Input Voltage | 24 VDC ±5% |
| | | Input Current | 0.27 [0.57] |
| Electromagnetic Brake | | Type | Power Off Activated Type |
| | | Power Supply Input | 24 VDC ±10% |
| | | Power Consumption | 7.2 |
| ⑭ Static Friction Torque | | Rated Current | 0.3 |
| | N·m (oz-in) | | 1.27 (180) |

① Rated Output Power

This is the permissible range the temperature rise may not exceed when continuously operated at the motor's rated speed and rated torque.

② Rated Speed

This is the rotation speed when the motor is operated at rated output power.

③ Max. Speed

This is the maximum rotation speed the motor can turn at.

④ Rated Torque

This is the output torque when the motor is operated at rated output power and rated speed.

⑤ Maximum Instantaneous Torque

This is the maximum torque that can be used instantaneously (in a short period of time).

It is the maximum for acceleration and deceleration, and up to this torque can be used.

⑥ Permissible Speed Range

This is the range of the operable rotation speed on the output gear shaft.

⑦ Rotor Inertia

This refers to the inertia of the rotor inside the motor.

This is necessary when the required torque (acceleration torque) for the motor is calculated.

⑧ Inertia

This is the inertia in the gearhead.

This is necessary when the required torque (acceleration torque) for the motor is calculated.

⑨ Permissible Load Inertia

This is the load inertia that the motor can stably control.

Control can become unstable if a load exceeding this value is applied, resulting in speed regulation variation and issues with protection circuit operation, vibration, etc.

⑩ Gear Ratio

This is the ratio of the rotation speed between the input speed from the motor and the speed of the output gear shaft. For example, a gear ratio of 10 indicates that when the input speed from the motor is 10 r/min, the output gear shaft speed is 1 r/min.

⑪ Resolution

This indicates the angle of rotation of the output shaft in one pulse. For example, if the resolution = 1000 p/rev, one rotation of the motor (360°) can be divided into 1000.

⑫ Backlash

This is the play of the output gear shaft when the motor shaft is fixed.

When positioning in bi-direction, the positioning accuracy is affected.

⑬ Rated Current


This is the input current of the main power supply required for use in the continuous duty region.

⑭ Static Friction Torque

This is the electromagnetic brake specifications. It is the maximum holding torque (holding force) at which the electromagnetic brake can hold position.

How to Read Speed – Torque Characteristics

AZXM640□C

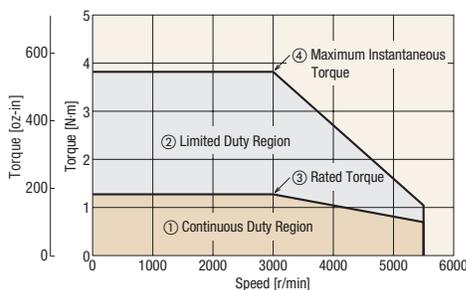

① Continuous Duty Region

This is the region that can be used at continuous rating. The effective load torque must be corrected to this region.


② Limited Duty Region

This is the region used for acceleration and deceleration.

③ Rated Torque

This is the output torque when the motor is operated at rated output power and rated speed.

AZXM940□C-PS5

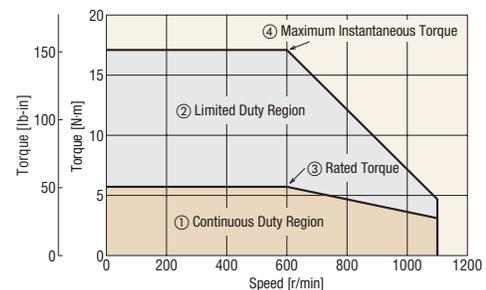

④ Maximum Instantaneous Torque

This is the maximum torque that can be used instantaneously (in a short period of time).

It is the maximum for acceleration and deceleration, and up to this torque can be used.

Standard Type

Frame Size 60 mm (2.36 in.)

Specifications



| Motor Product Name | | Single Shaft | AZXM640AC |
|------------------------------|----------------------|--|--|
| | | With Electromagnetic Brake | AZXM640MC |
| Driver Product Name | | | AZXD-S <input type="checkbox"/> |
| Rated Output Power | | W (HP) | 400 (1/2) |
| Rated Speed | | r/min | 3000 |
| Max. Speed | | r/min | 5500 |
| Rated Torque | | N·m (oz·in) | 1.27 (180) |
| Maximum Instantaneous Torque | | N·m (oz·in) | 3.82 (540) |
| Rotor Inertia | | J: kg·m ² (oz·in ²) | 0.294 × 10 ⁻⁴ (1.61) [0.316 × 10 ⁻⁴ (1.73)]*1 |
| Permissible Inertia*2 | | J: kg·m ² (lb·in ²) | 14.7 × 10 ⁻⁴ (5.0) |
| Resolution | | P/R | 100~10000 (Factory setting 1000) |
| Detector | | | Mechanical Multi-Turn Absolute Encoder 1 Turn: 16 bit Multi-Turn: ±900 rotations (1800 rotations) |
| Power Supply Input | Main Power Supply | Input Voltage | Single-Phase/Three-Phase 200-240 VAC -15~+6% 50/60 Hz |
| | | Rated Current*3 | A |
| | Control Power Supply | Input Voltage | 24 VDC ±5% |
| | | Input Current | 0.27 [0.57]*1 |
| Electromagnetic Brake*4 | | Type | Power Off Activated Type |
| | | Power Supply Input | 24 VDC ±10% |
| | | Power Consumption | W |
| | | Rated Current | A |
| | | Static Friction Torque | N·m (oz·in) |

● A letter indicating the driver type is specified where the box is located in the product name. Check "List of Combinations" on page 5 for driver product names.

*1 The value inside the [] represents the value when connecting an electromagnetic brake motor.

*2 50 times the rotor inertia.

*3 The value when operated in the continuous duty region. When operated in the limited duty region, a maximum of approximately 3 times the current flows.

*4 The electromagnetic brake holds position when the power is off. It cannot be used for braking applications.

Note


● When the motor is continuously operated at rating, a heat sink of a capacity at least equivalent to an aluminum plate of the following size is required.

AZXM640 **C**: 300 mm × 300 mm (11.81 in. × 11.81 in.), 10 mm (0.39 in.) thick

Speed – Torque Characteristics

AZXM640 C

Power supply specification: Three-phase/single-phase 200-240 VAC

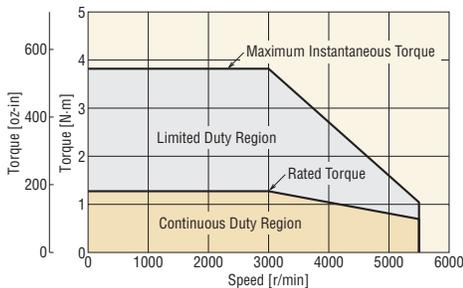

Note

● A regeneration unit may be needed depending on the operating conditions. Regeneration units → Page 27

● Either **A** (standard) or **M** (type with an electromagnetic brake) indicating the configuration is specified where the box is located in the product name.

Standard Type

Frame Size 85 mm (3.35 in.)

Specifications



| Motor Product Name | | Single Shaft | AZXM960AC | |
|------------------------------|-----------------------------|--|--|------------------------------------|
| Driver Product Name | | With Electromagnetic Brake | AZXM960MC | |
| Rated Output Power | | W (HP) | 600 (4/5) | |
| Rated Speed | | r/min | 3000 | |
| Max. Speed | | r/min | 5500 | |
| Rated Torque | | N·m (oz·in) | 1.91 (270) | |
| Maximum Instantaneous Torque | Single-Phase 200-240 VAC | N·m (oz·in) | 3.82 (540) | |
| | Three-Phase 200-240 VAC | N·m (oz·in) | 7.16 (1020) | |
| Rotor Inertia | | J: kg·m ² (oz·in ²) | 0.948 × 10 ⁻⁴ (5.2) [1.03 × 10 ⁻⁴ (5.6)]*1 | |
| Permissible Inertia*2 | | J: kg·m ² (oz·in ²) | 47.4 × 10 ⁻⁴ (260) | |
| Resolution | | P/R | 100~10000 (Factory setting 1000) | |
| Detector | | | Mechanical Multi-Turn Absolute Encoder 1 Turn: 16 bit Multi-Turn: ±900 rotations (1800 rotations) | |
| Power Supply Input | Main Power Supply | Input Voltage | Single-Phase/Three-Phase 200-240 VAC -15~+6% 50/60 Hz | |
| | | Rated Current*3 | A | Single-Phase: 7.1 Three-Phase: 3.9 |
| Electromagnetic Brake*4 | Control Power Supply | Input Voltage | 24 VDC ±5% | |
| | | Input Current | A | 0.27 [0.62]*1 |
| | | Type | Power Off Activated Type | |
| | | Power Supply Input | 24 VDC ±10% | |
| | | Power Consumption | W | 8.5 |
| | | Rated Current | A | 0.35 |
| | | Static Friction Torque | N·m (oz·in) | 1.91 (270) |

● A letter indicating the driver type is specified where the box is located in the product name. Check "List of Combinations" on page 5 for driver product names.

*1 The value inside the [] represents the value when connecting an electromagnetic brake motor.

*2 50 times the rotor inertia.

*3 The value when operated in the continuous duty region. When operated in the limited duty region, a maximum of approximately 4 times the current flows for three-phase input, and a maximum of approximately 2 times the current flows for single-phase input.

*4 The electromagnetic brake holds position when the power is off. It cannot be used for braking applications.

Note


● When the motor is continuously operated at rating, a heat sink of a capacity at least equivalent to an aluminum plate of the following size is required.

AZXM960C: 350 mm×350 mm (13.78 in.×13.78 in.), 10 mm (0.39 in.) thick

Speed – Torque Characteristics

AZXM960C

Power supply specification: Three-phase 200-240 VAC

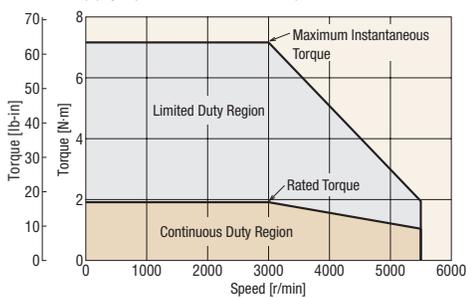


Note

● A regeneration unit may be needed depending on the operating conditions. Regeneration units → Page 27

AZXM960C

Power supply specification: Single-phase 200-240 VAC

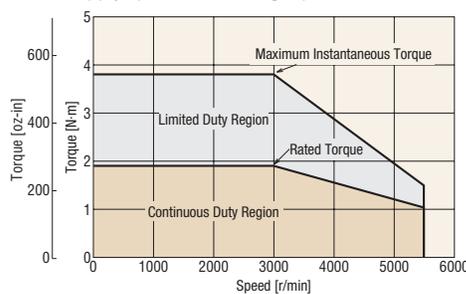

● Either **A** (standard) or **M** (type with an electromagnetic brake) indicating the configuration is specified where the box is located in the product name.

PS Geared Type

Frame Size 90 mm (3.54 in.)

Specifications



| Motor Product Name | | Single Shaft | AZXM940AC-PS5 | AZXM940AC-PS10 | AZXM940AC-PS25 | AZXM960AC-PS5 |
|------------------------------|--------------------------|--|--|--|--|---|
| Driver Product Name | | With Electromagnetic Brake | AZXM940MC-PS5 | AZXM940MC-PS10 | AZXM940MC-PS25 | AZXM960MC-PS5 |
| Rated Output Power | | W (HP) | 400 (1/2) | | | 600 (4/5) |
| Rated Torque | | N-m (lb-in) | 5.72 (50) | 11.4 (101) | 25.7 (220) | 8.6 (76) |
| Maximum Instantaneous Torque | Single-Phase 200-240 VAC | N-m (lb-in) | 17.1 (151) | 34.3 (300) | 77.2 (680) | 17.2 (152) |
| | Three-Phase 200-240 VAC | N-m (lb-in) | | | | 32.2 (284) |
| Permissible Speed Range | | r/min | 0~1100 | 0~550 | 0~220 | 0~1100 |
| Rotor Inertia | | J: kg-m ² (oz-in ²) | 0.294×10 ⁻⁴ (1.61) [0.316×10 ⁻⁴ (1.73)] *1 | | | 0.948×10 ⁻⁴ (5.2) [1.03×10 ⁻⁴ (5.6)] *1 |
| Inertia*2 | | J: kg-m ² (lb-in ²) | 0.163×10 ⁻⁴ (0.056) | 0.160×10 ⁻⁴ (0.055) | 0.175×10 ⁻⁴ (0.060) | 0.163×10 ⁻⁴ (0.056) |
| Permissible Inertia*3 | | J: kg-m ² (lb-in ²) | 0.037 (126) | 0.147 (500) | 0.919 (3100) | 0.119 (410) |
| Gear Ratio | | | 5 | 10 | 25 | 5 |
| Resolution | | P/R | 500~50000 (Factory setting 5000) | 1000~100000 (Factory setting 10000) | 2500~250000 (Factory setting 25000) | 500~50000 (Factory setting 5000) |
| Detector | | | Mechanical Multi-Turn Absolute Encoder 1 Turn: 16 bit Multi-Turn: ±900 rotations (1800 rotations) | | | |
| Backlash | | arcmin | 15 (0.25°) | | | |
| Power Supply Input | Main Power Supply | Input Voltage | Single-Phase/Three-Phase 200-240 VAC -15~+6% 50/60 Hz | | | |
| | | Rated Current*4 | A | Single-Phase: 5.3 Three-Phase: 3.0 | | Single-Phase: 7.1 Three-Phase: 3.9 |
| Electromagnetic Brake*5 | Control Power Supply | Input Voltage | 24 VDC±5% | | | |
| | | Input Current | A | 0.27 [0.57]*1 | | 0.27 [0.62]*1 |
| Electromagnetic Brake*5 | | Type | Power Off Activated Type | | | |
| | | Power Supply Input | 24 VDC±10% | | | |
| | | Power Consumption | W | 7.2 | | 8.5 |
| | | Rated Current | A | 0.3 | | 0.35 |
| | Static Friction Torque | N-m (oz-in) | 1.27 (180) | | | 1.91 (270) |

● A letter indicating the driver type is specified where the box ■ is located in the product name. Check "List of Combinations" on page 5 for driver product names.

*1 The value inside the [] represents the value when connecting an electromagnetic brake motor.

*2 This is the value of the internal inertia of the gear converted to the motor shaft.

*3 The square of 50 times the rotor inertia × the gear ratio.

*4 The value when operated in the continuous duty region (the region that can be used at continuous rating).

When operated in the limited duty region (the region used for acceleration and deceleration), the following current flows.

● AZXM940: Approx. 3 times max.

● AZXM960 single-phase: Approx. 2 times max.


● AZXM960 three-phase: Approx. 4 times max.

*5 The electromagnetic brake holds position when the power is off. It cannot be used for braking.

Speed – Torque Characteristics


AZXM940■C-PS5

Power supply specification: Three-phase/single-phase 200-240 VAC

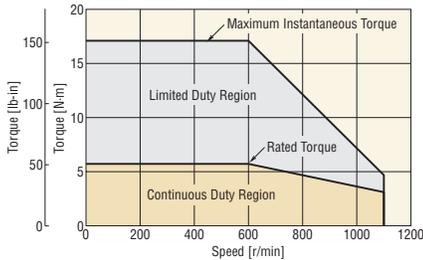


AZXM940■C-PS10

Power supply specification: Three-phase/single-phase 200-240 VAC

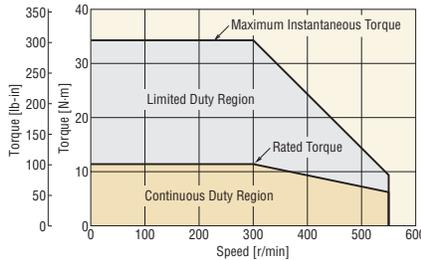


AZXM940■C-PS25

Power supply specification: Three-phase/single-phase 200-240 VAC

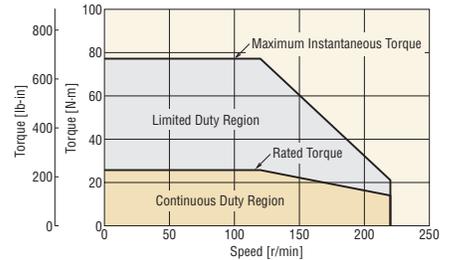


AZXM960■C-PS5

Power supply specification: Three-phase 200-240 VAC

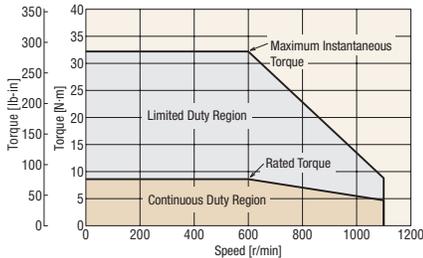

AZXM960■C-PS5

Power supply specification: Single-phase 200-240 VAC

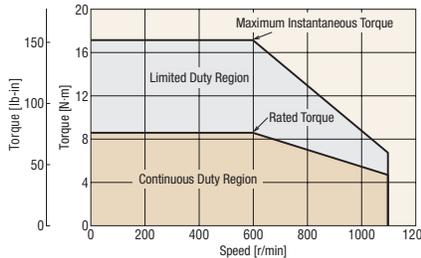

Note

● A regeneration unit may be needed depending on the operating conditions. Regeneration units → Page 27

● Either **A** (standard) or **M** (type with an electromagnetic brake) indicating the configuration is specified where the box □ is located in the product name.

Driver Specifications

| Driver Product Name | | AZXD-SED | AZXD-SEP |
|---------------------|--------------------------------|----------|---|
| Interface | Control Input | | 6 Points, Photocoupler |
| | Pulse Output | | 2 Points, Line Driver |
| | Control Output | | 6 Points, Photocoupler and Open-Collector |
| | Power Shut Down Signal Input | | 2 Points, Photocoupler |
| | Power Shut Down Monitor Output | | 1 Point, Photocoupler and Open-Collector |
| | Field Network | EtherCAT | EtherNet/IP |

Driver Functions

EtherCAT-Compatible

| Driver Product Name | | AZXD-SED |
|-------------------------------|--------|--|
| Remote I/O | Input | 16 Points |
| | Output | 16 Points |
| Operation Modes | | Profile Position Mode (PP) |
| | | Profile Speed Mode (PV) |
| | | Return-to-Home Mode (HM) |
| | | Cyclic Synchronous Position Mode (CSP) |
| | | Cyclic Synchronous Speed Mode (CSV) |
| Setting Tool | | Support Software MEXE02 |
| Coordinates Management Method | | Battery-Free Absolute System |
| Monitor and Information | | As shown in the table below. |
| Alarm | | ○ |

EtherNet/IP-Compatible

| Driver Product Name | | AZXD-SEP | | |
|---------------------------------|--------------------------|---|----------------------|---|
| Number of Positioning Data Sets | | 256 Points | | |
| Remote I/O | Input | 16 Points | | |
| | Output | 16 Points | | |
| Setting Tool | | Support Software MEXE02 | | |
| Coordinates Management Method | | Battery-Free Absolute System | | |
| Operation | Positioning Operation | Independent Operation | ○ | |
| | | Linked Operation | Sequential Operation | ○ |
| | | Multi-Speed Operation (Continuous Sequential Operation) | ○ | |
| | Sequence Control | Loop Operation (Repeating) | ○ | |
| | | Event Jump Operation | ○ | |
| | | Continuous Operation | ○ | |
| | Return-To-Home Operation | Return-To-Home Operation | ○ | |
| | | High-Speed Return-to-Home Operation | ○ | |
| | JOG Operation | | ○ | |
| | Monitor and Information | | Waveform Monitoring | ○ |
| | | Overload Detection | ○ | |
| | | Overheat Detection (Motor and driver) | ○ | |
| | | Position and Speed Information | ○ | |
| | | Temperature Detection (Motor and driver) | ○ | |
| | | Motor Load Factor | ○ | |
| Alarm | | Distance Traveled / Integrating Distance Traveled | ○ | |

Communication Specifications

EtherCAT-Compatible

| | |
|------------------------------|---|
| Communication Protocol | IEC 61158 Type12 |
| Physical Layer/Protocol | 100 BASE-TX (IEEE 802.3) |
| Baud Rate | 100 Mbps |
| Communication Cycle | -Free Run Mode: 1 ms min. -SM2 Event Synchronous Mode: 1 ms min. -DC Mode: 0.25 ms, 0.5 ms, 1 ms, 2 ms, 3 ms, 4 ms, 5 ms, 6 ms, 7 ms, 8 ms, 9 ms, 10 ms |
| Communication Port/Connector | RJ45×2 (Shield-compatible) ECAT IN: EtherCAT Input ECAT OUT: EtherCAT Output |
| Topology | Daisy Chain (Max. 65,535 nodes) |
| Process Data | Variable PDO Mapping |
| Sync Manager | -SM0: Mailbox Output -SM1: Mailbox Input -SM2: Process Data Output -SM3: Process Data Input |
| Mailbox (CoE) | -Emergency Messages -SDO Request -SDO Response -SDO Information |
| Synchronous Mode | -Free Run Mode (Asynchronous) -SM2 Event Synchronous Mode -DC Mode (SYNCO Event Synchronous) |
| Device Profile | IEC 61800-7 CiA402 Drive Profile |

● EtherNet/IP-Compatible

| | | |
|---------------------------|---|-----------------------------|
| Communication Protocol | EtherNet/IP (Complies with CT18) | |
| Vendor ID | 187: Oriental Motor Co., Ltd | |
| Device Type | 43: Generic Device | |
| Baud Rate | 10/100 Mbps (Autonegotiation) | |
| Communication Mode | Full Duplex/Half Duplex (Autonegotiation) | |
| Cable Specifications | Shielded Twisted-Pair (STP) Cable Stroke/Cross, Category 5e min. Recommended | |
| Bytes | Output (Scanner→Driver) | 40 bytes |
| | Input (Driver→Scanner) | 56 bytes |
| Implicit Communication | Compatible Connections | 2 |
| | Connection Type | Exclusive Owner, Input Only |
| | Communication Cycle (RPI) | 1~3200 ms |
| | Connection Type (Scanner→Driver) | Point-to-Point |
| | Connection Type (Driver→Scanner) | Point-to-Point, Multicast |
| | Data Reflection Trigger | Cyclic |
| IP Address Setting Method | IP Address Setting Switch, Parameter, DHCP | |
| Compatible Topologies | Star, Linear, Ring (Device Level Ring) | |

■ General Specifications


| | Motor | Driver |
|---|---|---|
| Thermal Class | 130 (B) | — |
| Insulation Resistance | 100 MΩ or more when a 500 VDC megger is applied between the following places: -Case-Motor Winding -Case-Electromagnetic Brake Winding*1 | 100 MΩ or more when a 500 VDC megger is applied between the following places: -Protective Earth Terminal-Main Power Supply Terminal -Encoder Connector-Main Power Supply Terminal -I/O Signal Terminal-Main Power Supply Terminal |
| Dielectric Strength | Sufficient to withstand the following for 1 minute: -Case-Motor Winding 1.5 kVAC 50 Hz or 60 Hz -Case-Electromagnetic Brake Winding*1 1.0 kVAC 50 Hz or 60 Hz | Sufficient to withstand the following for 1 minute: -Protective Earth Terminal-Main Power Supply Terminal 1.5 kVAC 50 Hz or 60 Hz -Encoder Connector-Main Power Supply Terminal 1.8 kVAC 50 Hz or 60 Hz -I/O Signal Terminal-Main Power Supply Terminal 1.8 kVAC 50 Hz or 60 Hz |
| Operating Environment (In operation) | Ambient Temperature | 0~+40°C (0~+104°F) (Non-freezing)*2 |
| | Ambient Humidity | 85% or less (Non-condensing) |
| | Atmosphere | No corrosive gases or dust. The product should not be exposed to water, oil or other liquids. |
| Degree of Protection | IP65 (excluding installation surfaces and connectors) | IP10 |
| Shaft Runout | 0.05 (0.002)T.I.R. [mm (in.)]*4 | — |
| Concentricity of Installation Pilot to the Shaft | 0.075 (0.003)T.I.R. [mm (in.)]*4 | — |
| Perpendicularity of Installation Surface to the Shaft | 0.075 (0.003)T.I.R. [mm (in.)]*4 | — |

*1 Only for products with an electromagnetic brake

*2 Based on Oriental Motor's internal measurement conditions

*3 When a heat sink of a capacity at least equivalent to an aluminum plate with a size of 200×200 mm (7.87×7.87 in.) and 2 mm (0.08 in.) thickness

*4 T.I.R. (Total Indicator Reading): The total dial gauge reading when the measurement section is rotated once around the reference axis center.

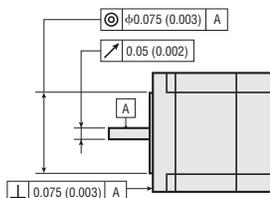

Note

● Separate the motor and driver when measuring insulation resistance or performing a dielectric voltage withstand test. Also, do not perform these tests on the absolute encoder part of the motor.

Permissible Radial Load and Permissible Axial Load


Unit: N (lb.)

| Type | Motor Frame Size | Product Name | Gear Ratio | Permissible Radial Load | | | | | Permissible Axial Load |
|-----------------------|------------------|----------------|------------|----------------------------------|-----------|-----------|-----------|------------|------------------------|
| | | | | Distance from Shaft End mm (in.) | | | | | |
| | | | | 0 (0) | 5 (0.2) | 10 (0.39) | 15 (0.59) | 20 (0.79) | |
| Standard Type | 60 mm (2.36 in.) | AZXM640 | - | 230 (51) | 245 (55) | 262 (58) | 281 (63) | 304 (68) | 98 (22) |
| | 85 mm (3.35 in.) | AZXM960 | - | 376 (84) | 392 (88) | 408 (91) | 426 (95) | 446 (100) | 147 (33) |
| PS Geared Type | 90 mm (3.54 in.) | AZXM940 | 5 | 380 (85) | 420 (94) | 470 (105) | 540 (121) | 630 (141) | 600 (135) |
| | | | 10 | 480 (108) | 530 (119) | 590 (132) | 680 (153) | 790 (177) | |
| | | | 25 | 650 (146) | 720 (162) | 810 (182) | 920 (200) | 1070 (240) | |
| | | AZXM960 | 5 | 380 (85) | 420 (94) | 470 (105) | 540 (121) | 630 (141) | 600 (135) |

- The product names are listed such that the product names are distinguishable.
- When the **PS** geared type with an input speed of 3000 r/min operates with either a radial load or axial load, a lifetime of 10000 hours is the permissible value.
For the life of gearhead, please contact the nearest Oriental Motor sales office, or visit the Oriental Motor website.

Radial Load and Axial Load

Distance from Shaft End [mm (in.)]




Rotation Direction

This indicates the rotation direction when viewed from the output shaft side of the motor.

Please check the following table for the rotation direction of the output gear shaft when viewed from the output shaft side of the standard type motor.

| Type | Gear Ratio | When Viewed from the Output Shaft Side of the Motor Rotation Direction |
|-----------------------|------------------|---|
| PS Geared Type | Total Gear Ratio | Same Direction |

Standard Type Motor

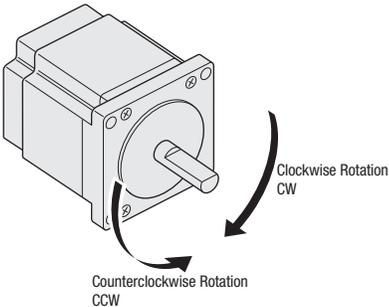

Dimensions [Unit = mm (in.)]


● Motor

◇ Standard Type

Frame Size 60 mm (2.36 in.) 400 W (1/2 HP)

2D & 3D CAD


| Product Name | L | Mass kg (lb.) | 2D CAD |
|------------------|--------------|------------------|--------|
| AZXM640AC | 121.5 (4.78) | 1.5 (3.3) | C261 |

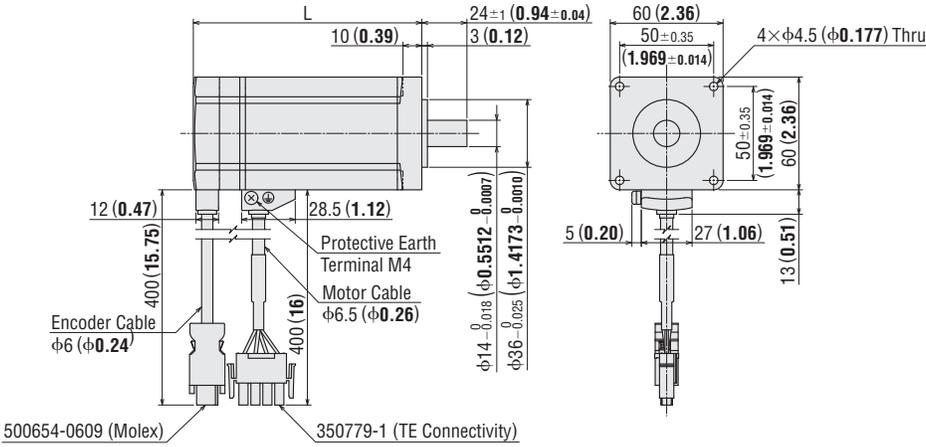

Frame Size 85 mm (3.35 in.) 600 W (4/5 HP)

2D & 3D CAD

| Product Name | L | Mass kg (lb.) | 2D CAD |
|------------------|------------|------------------|--------|
| AZXM960AC | 132 (5.20) | 3.1 (6.8) | C267 |

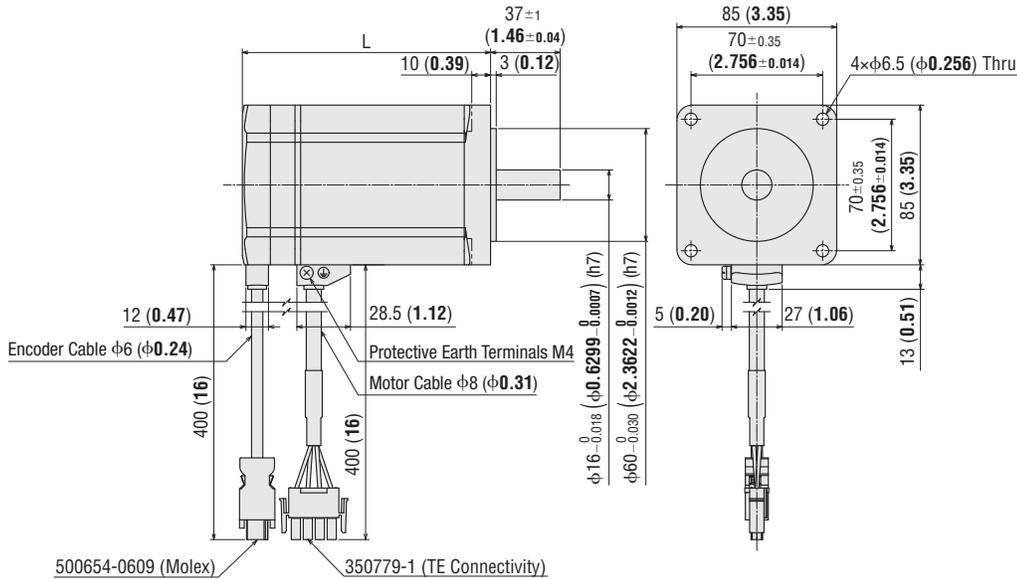


◇ Standard Type with an Electromagnetic Brake

Frame Size 60 mm (2.36 in.) 400 W (1/2 HP)

2D & 3D CAD


| Product Name | L | Mass kg (lb.) | 2D CAD |
|------------------|--------------|------------------|--------|
| AZXM640MC | 163.5 (6.44) | 2.0 (4.4) | C262 |

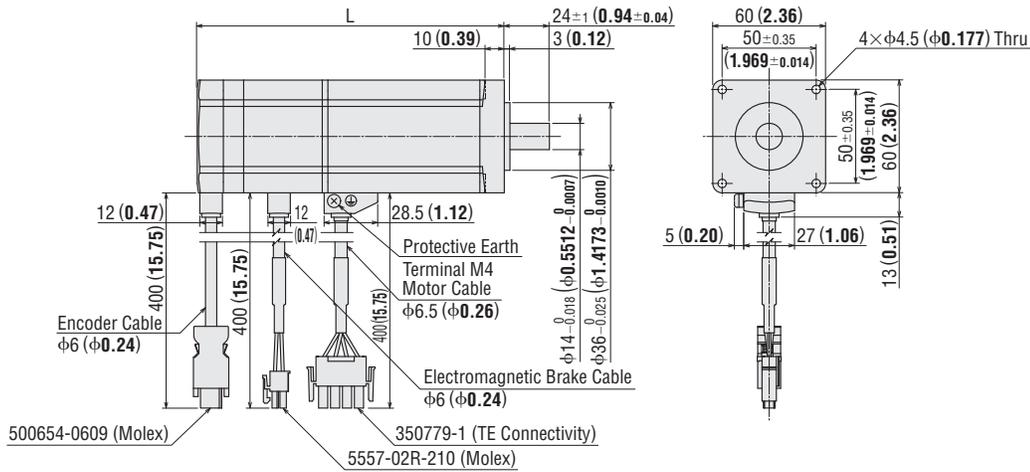

Frame Size 85 mm (3.35 in.) 600 W (4/5 HP)

2D & 3D CAD

| Product Name | L | Mass kg (lb.) | 2D CAD |
|------------------|------------|------------------|--------|
| AZXM960MC | 174 (6.85) | 4.0 (8.8) | C268 |

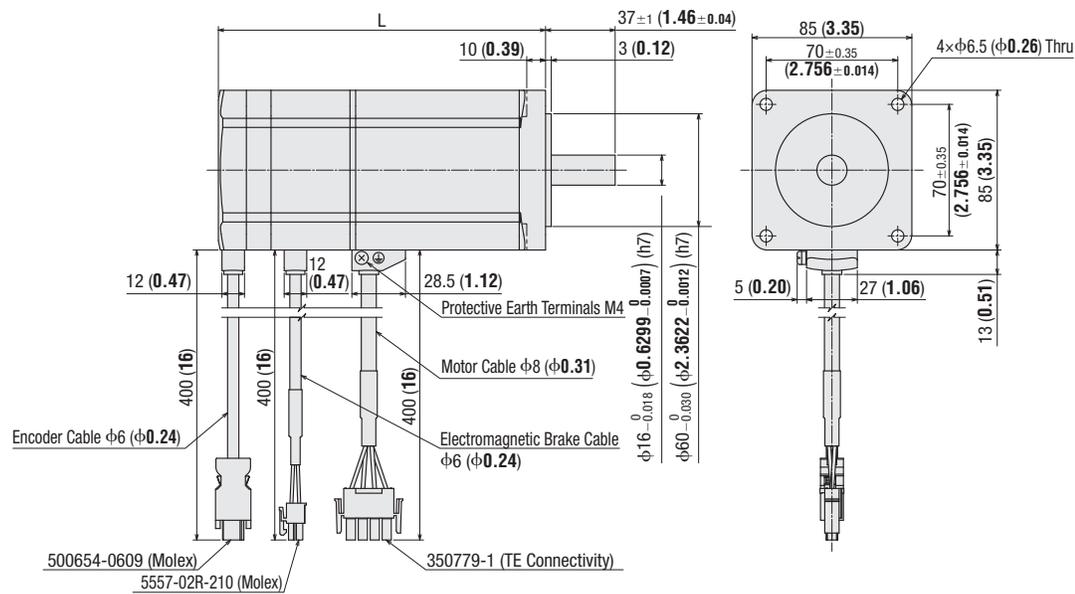


◆PS Geared Type

Frame Size 90 mm (3.54 in.) 400 W (1/2 HP)

2D & 3D CAD


| Product Name | Gear Ratio | L1 | L2 | Mass kg (lb.) | 2D CAD |
|-----------------------|--------------|----------------|-----------------|---------------|--------|
| AZXM940AC-PS ■ | 5, 10 | 61 (2.40) | 201.5 (7.93) | 3.5 (7.7) | C263 |
| | 25 | 88.3 (3.48) | 229 (9.02) | 4.4 (9.7) | C264 |

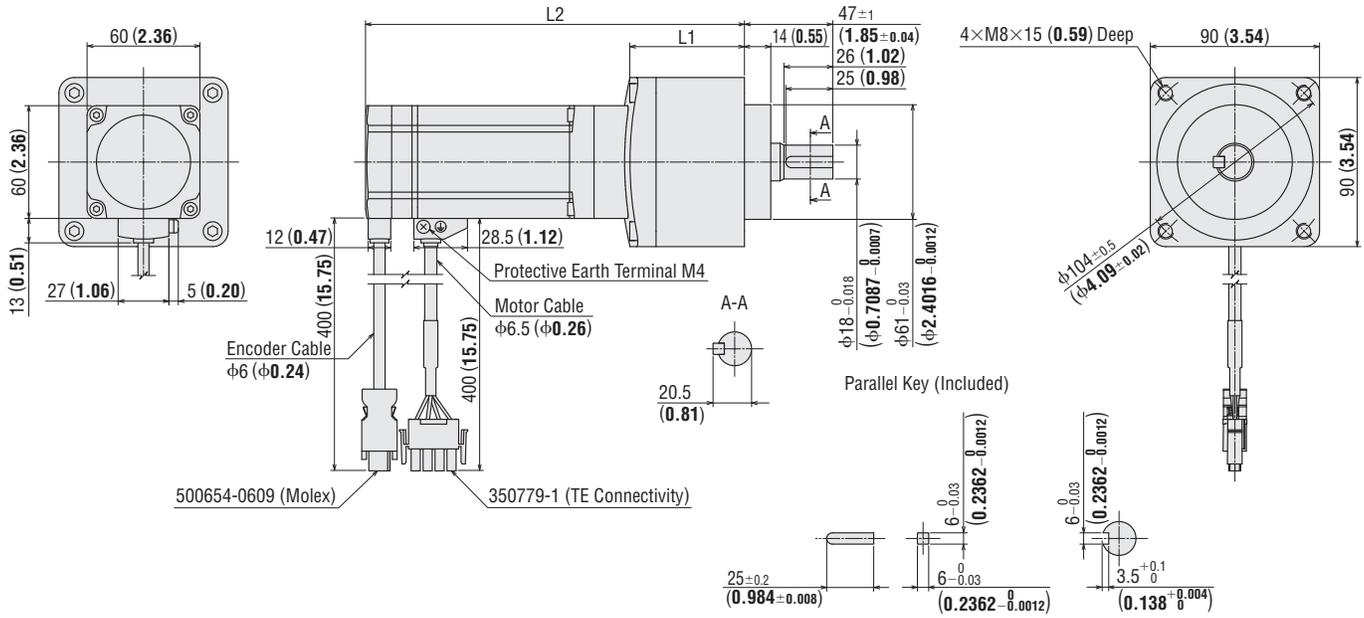

Frame Size 90 mm (3.54 in.) 600 W (4/5 HP)

2D & 3D CAD

| Product Name | Gear Ratio | L1 | L2 | Mass kg (lb.) | 2D CAD |
|-----------------------|------------|--------------|---------------|---------------|--------|
| AZXM960AC-PS ■ | 5 | 61 (2.40) | 226 (8.90) | 5.3 (11.7) | C269 |

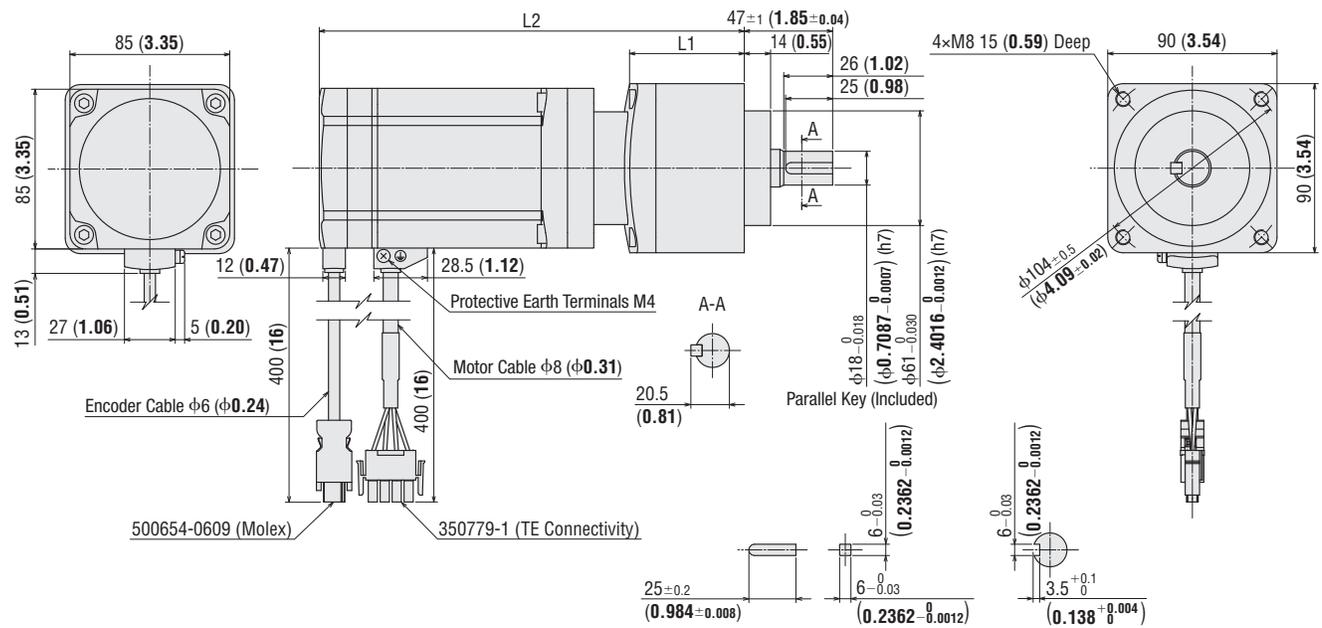


● A number indicating the gear ratio is specified where the box ■ is located in the product name.

◆PS Geared Type with Electromagnetic Brake

Frame Size 90 mm (3.54 in.) 400 W (1/2 HP)

2D & 3D CAD


| Product Name | Gear Ratio | L1 | L2 | Mass kg (lb.) | 2D CAD |
|-----------------------|--------------|----------------|------------------|------------------|--------|
| AZXM940MC-PS ■ | 5, 10 | 61 (2.40) | 243.5 (9.59) | 4.0 (8.6) | C265 |
| | 25 | 88.3 (3.48) | 270.5 (10.65) | 4.9 (10.8) | C266 |

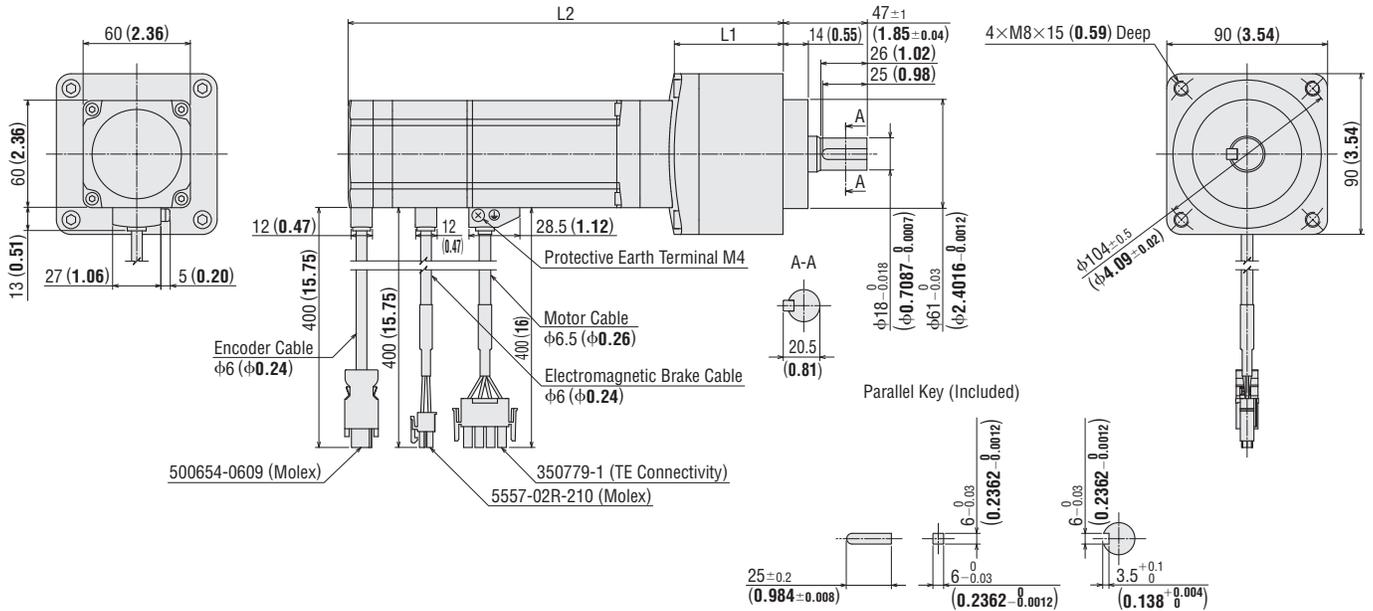

Frame Size 90 mm (3.54 in.) 600 W (4/5 HP)

2D & 3D CAD

| Product Name | Gear Ratio | L1 | L2 | Mass kg (lb.) | 2D CAD |
|-----------------------|------------|--------------|----------------|------------------|--------|
| AZXM960MC-PS ■ | 5 | 61 (2.40) | 268 (10.55) | 6.2 (13.4) | C270 |

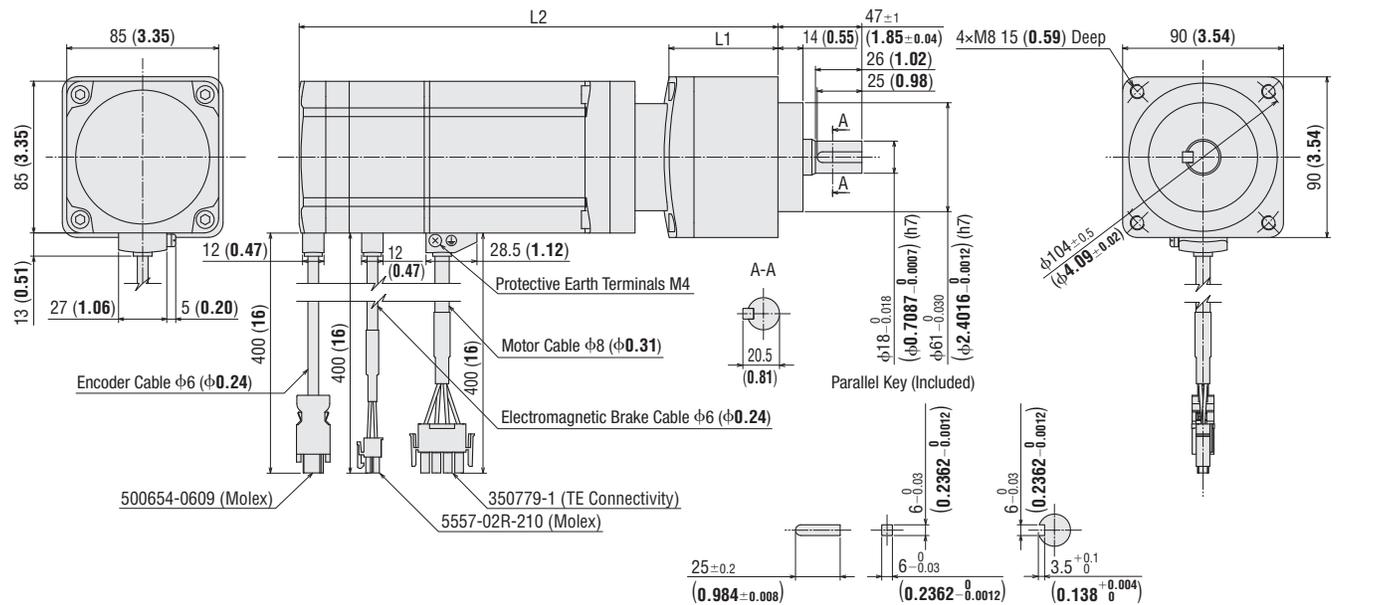


● A number indicating the gear ratio is specified where the box ■ is located in the product name.

● Driver

2D & 3D CAD

| Type | Product Name | Mass kg (lb.) | 2D CAD |
|------------------------|-----------------|------------------|--------|
| EtherCAT-Compatible | AZXD-SED | 1.5 (3.3) | C260 |
| EtherNet/IP-Compatible | AZXD-SEP | | |

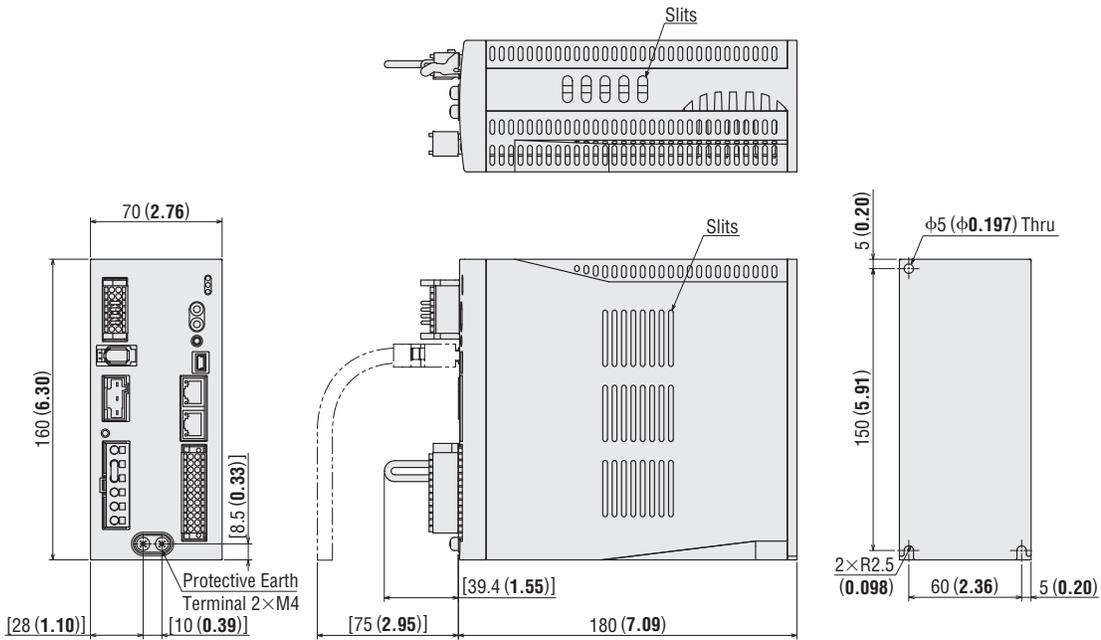

● Included Items

Control Power Supply Input/Electromagnetic Brake Connection/Regeneration Unit Thermal Input/Power Shut Down Signal I/O Connector (CN1)
 · Connector: DFMC1,5/7-ST-3,5-LR (Phoenix Contact)

Connector for Main Power/Regeneration Unit (CN4)

- Connector: 1-2271454-6 (TE Connectivity)
- Connector Wiring Lever

I/O Signals Connector (CN7)


- Connector: DFMC1,5/12-ST-3,5 (Phoenix Contact)

Connection and Operation


Names of Driver Parts

For details about each function, refer to the operating manual for the **AZX** Series. Either download operating manuals from the Oriental Motor website or contact your nearest Oriental Motor sales office.

◇ EtherCAT-Compatible

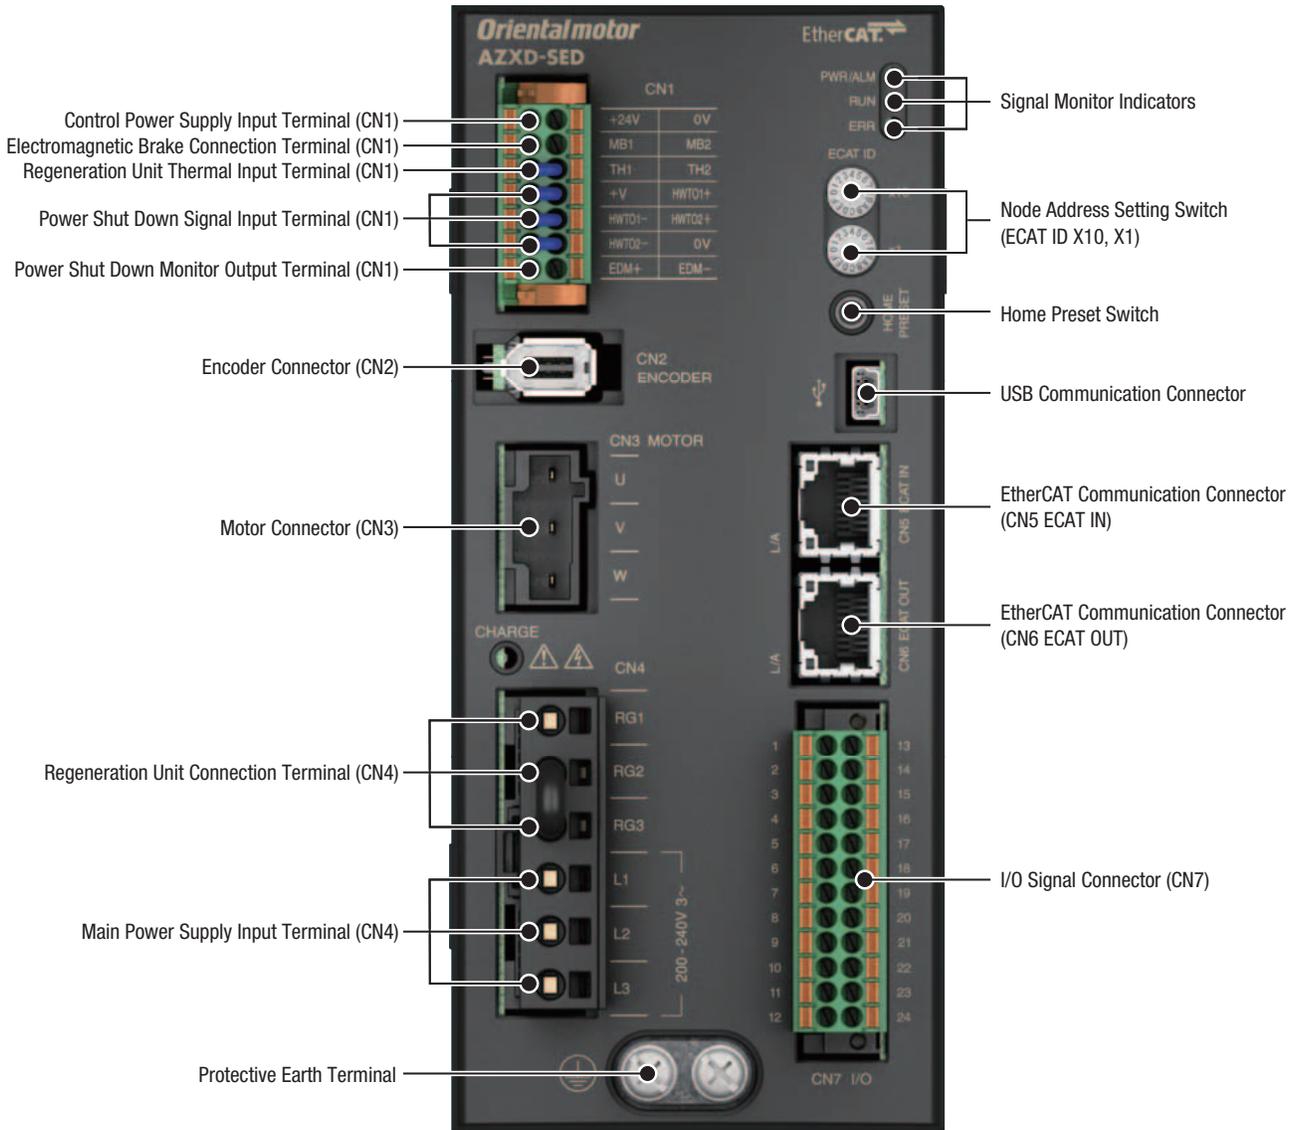

◇ EtherNet/IP-Compatible

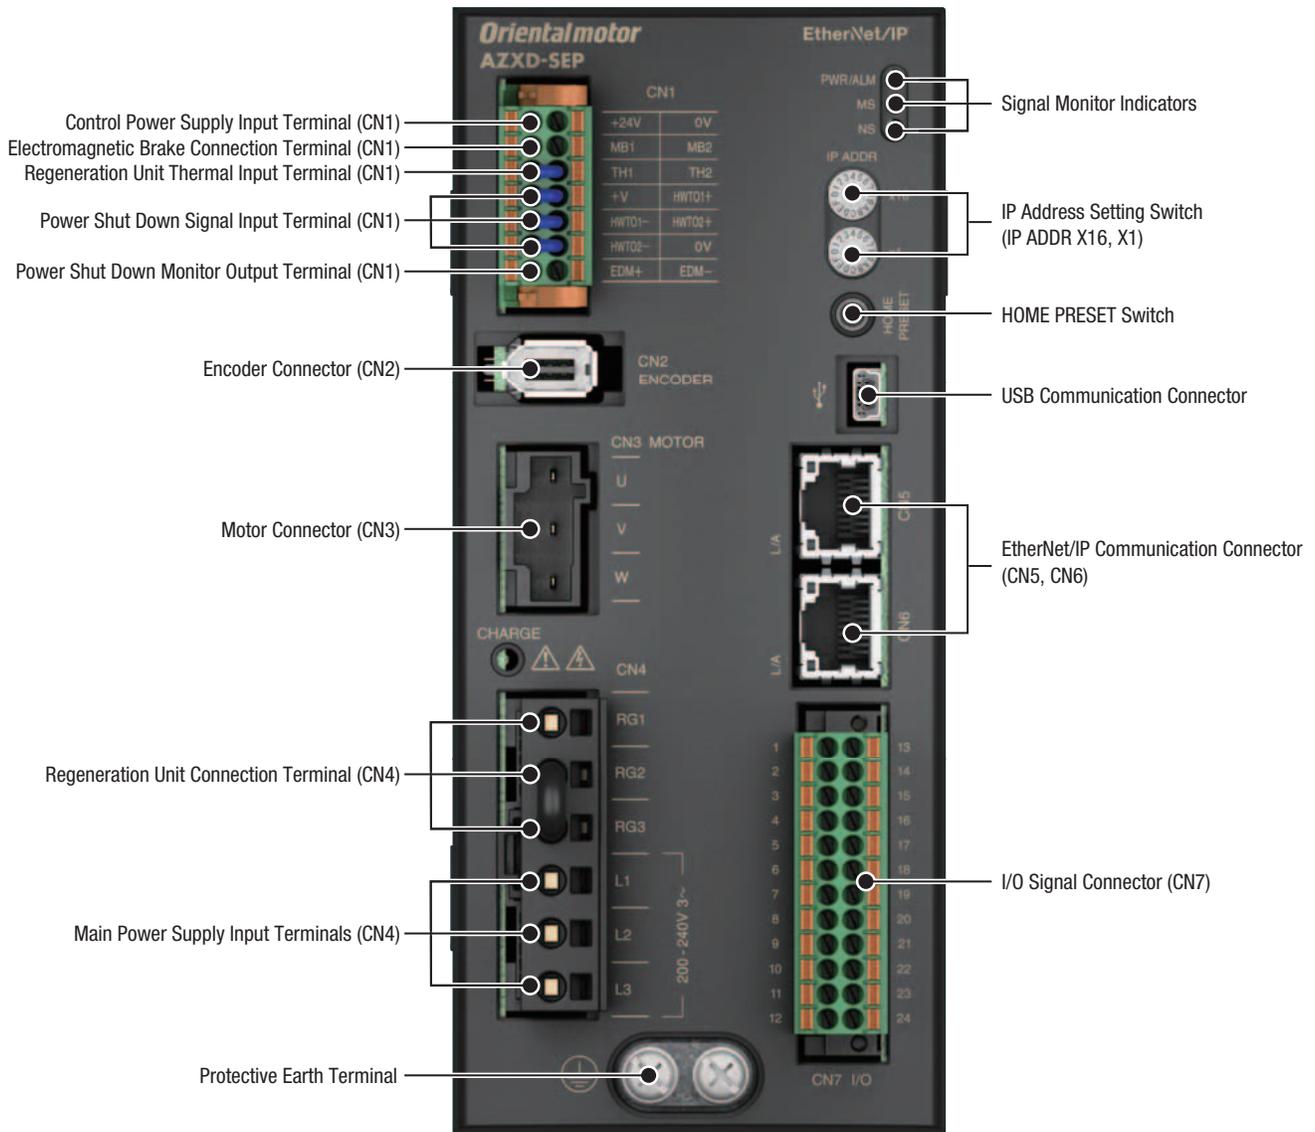

● USB Cable Connection


A USB cable is required for connecting the driver to the computer on which the support software **MEXE02** is installed. Use a USB cable with the following specifications.

| | |
|----------------|--|
| Specifications | USB 2.0 (Full Speed) |
| Cables | Length: 3 m (9.84 ft.) or less Configuration: A to mini B |


● Connection Diagrams

◇ EtherCAT-Compatible

● Diagram for Connection with Current Sink Output Circuit

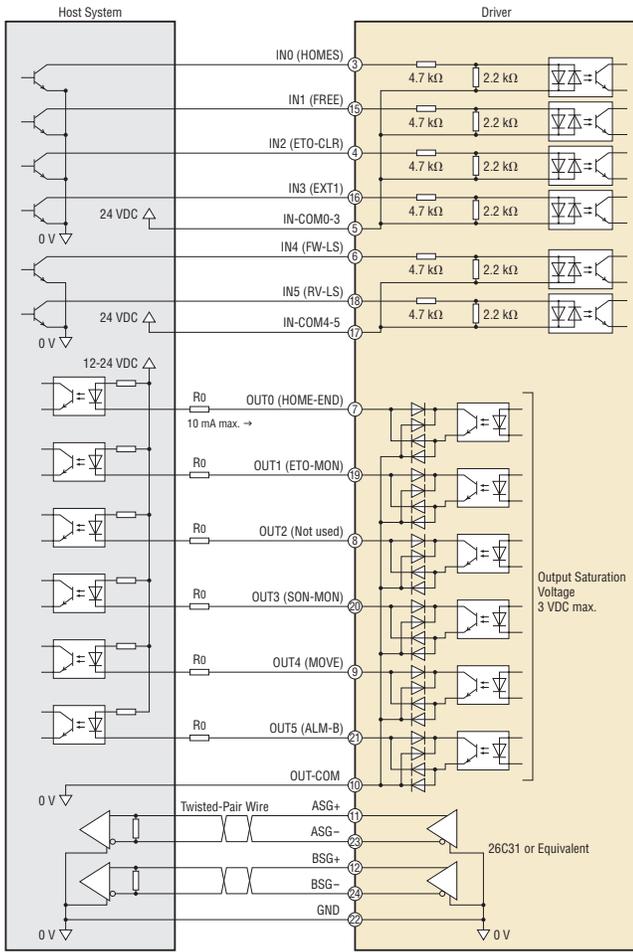

● Diagram for Connection with Current Source Output Circuit

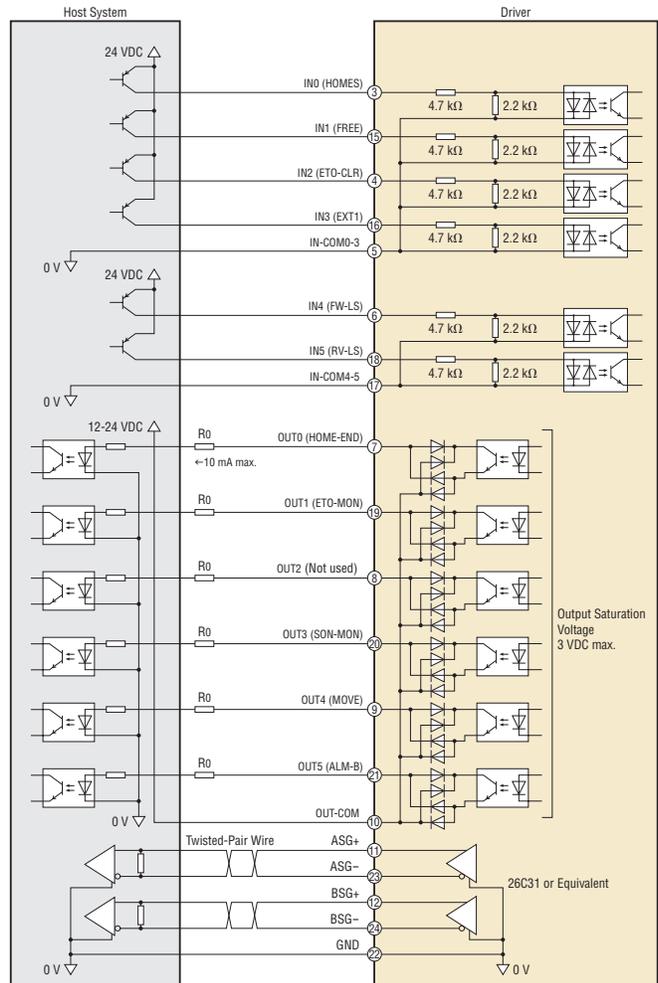


Note


- Use 24 VDC for the input signals.
- Use output signal at 12~24 VDC 10 mA or less. When the current value exceeds 10 mA, connect an external resistor R0 to reduce the current to 10 mA or less.
- Provide a distance of 200 mm (7.87 in.) or more between the signal lines and power lines (power supply lines, motor lines).
Do not run the signal lines in the same piping as power lines or bundle them with power lines.
- If noise generated by the motor cable or power supply cable causes a problem with the specific wiring or layout, shield the cable or use ferrite cores.

◆ EtherNet/IP-Compatible

● Diagram for Connection with Current Sink Output Circuit

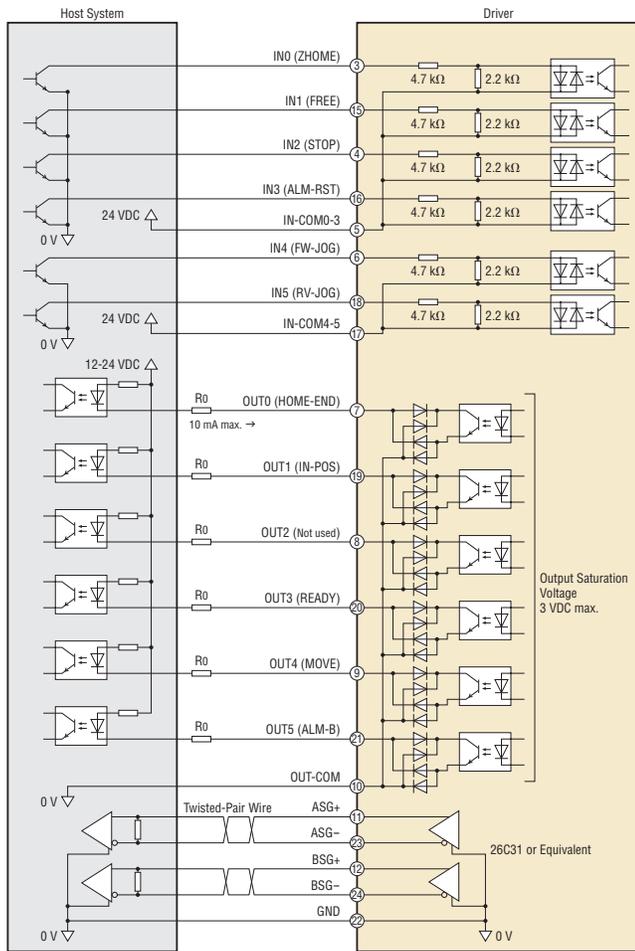

● Diagram for Connection with Current Source Output Circuit

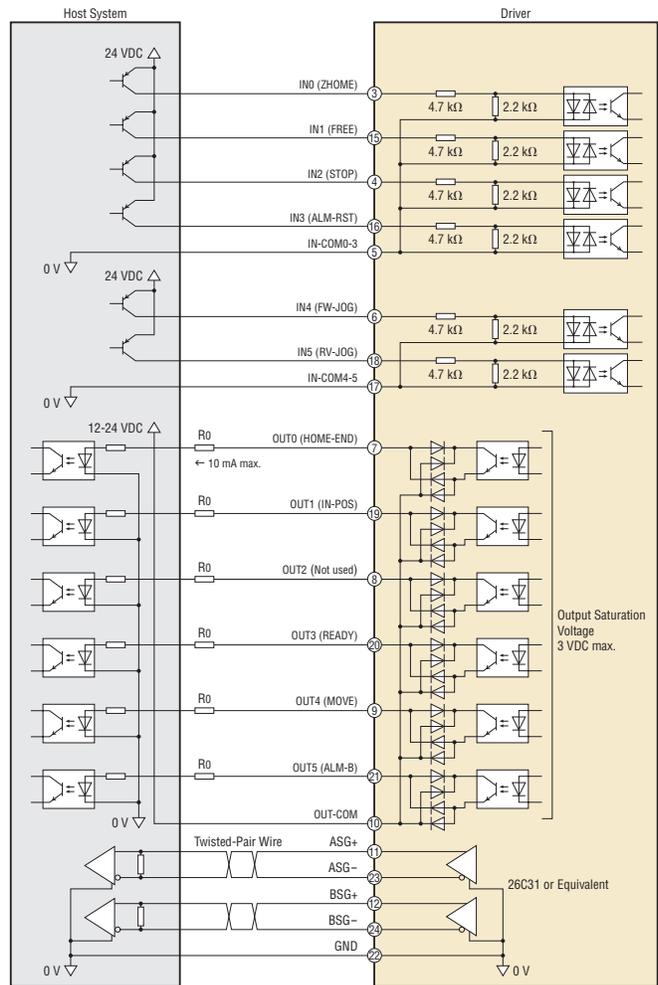


Note

- Use 24 VDC for the input signals.
- Use output signal at 12~24 VDC 10 mA or less. When the current value exceeds 10 mA, connect an external resistor R0 to reduce the current to 10 mA or less.
- Provide a distance of 200 mm (7.87 in.) or more between the signal lines and power lines (power supply lines, motor lines).
Do not run the signal lines in the same piping as power lines or bundle them with power lines.
- If noise generated by the motor cable or power supply cable causes a problem with the specific wiring or layout, shield the cable or use ferrite cores.

Cable

Cable System Configuration

Network Compatible Driver

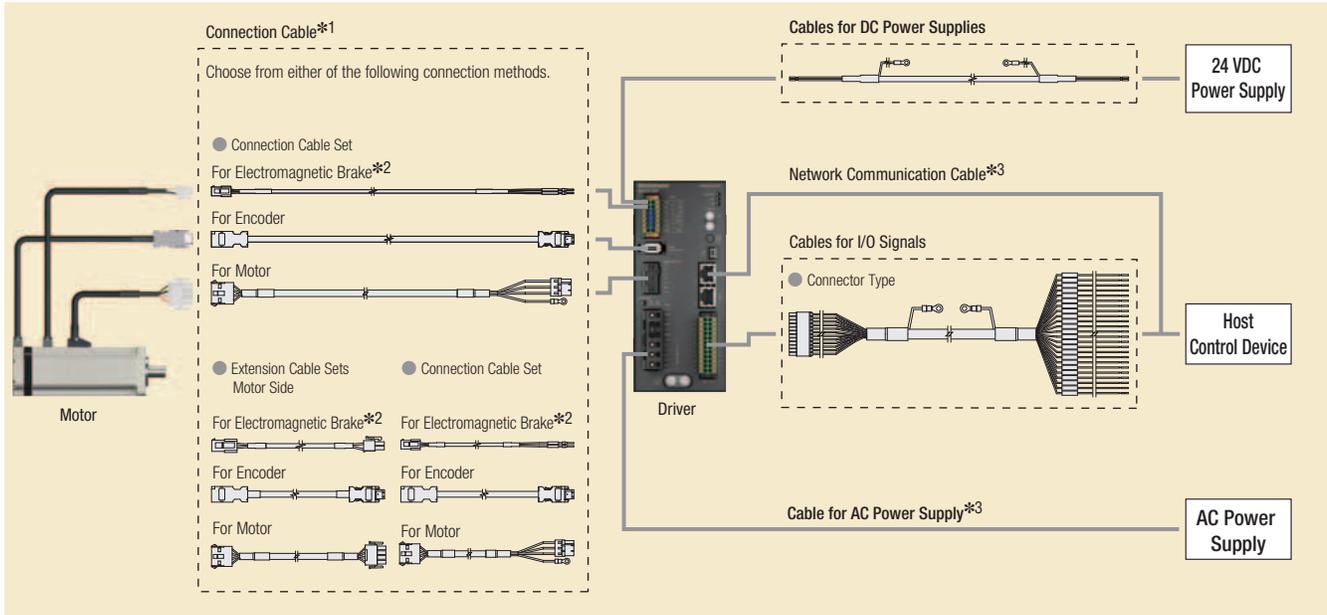

*1 Flexible connection cable sets and flexible extension cable sets with excellent durability are also available.


*2 Required for motors with an electromagnetic brake.

*3 Not supplied.

Note

- Up to 3 cables can be used to connect the motor and driver.
- The maximum extension distance between the motor and driver is 20 m (65.6 ft.).
- The motor cable and electromagnetic brake cable from the motor cannot be connected directly to the driver. When connecting to a driver, use a connection cable.

Connection Cable

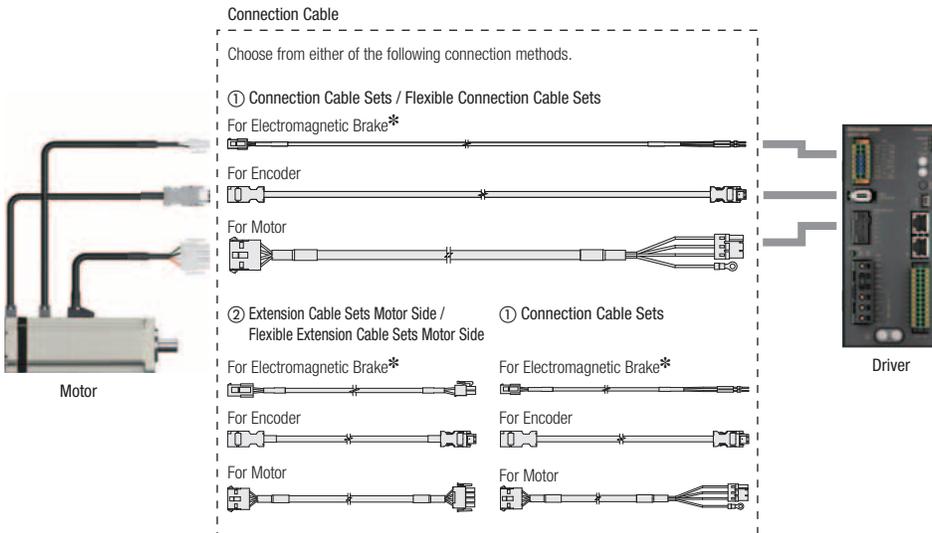

*Required for motors with an electromagnetic brake.

Note

- Up to 3 cables can be used to connect the motor and driver.
- The maximum extension distance between the motor and driver is 20 m (65.6 ft.).

① Connection Cable Sets / Flexible Connection Cable Sets

This is a connection cable set used to connect the motor and the driver. Use a flexible extension cable set in applications where the cable is bent and flexed repeatedly. The motor cable and electromagnetic brake cable from the motor cannot be connected directly to the driver. When connecting to a driver, use a connection cable.

● Product Line

◇ Connection Cable Set

· For Motor / Encoder



● For Motor / Encoder

| Length L [m (ft.)] | Product Name |
|--------------------|-----------------|
| 1 (3.3) | CC010VXF |
| 2 (6.6) | CC020VXF |
| 3 (9.8) | CC030VXF |
| 5 (16.4) | CC050VXF |
| 7 (23) | CC070VXF |
| 10 (32.8) | CC100VXF |
| 15 (49.2) | CC150VXF |
| 20 (65.6) | CC200VXF |

· For Motor / Encoder / Electromagnetic Brake



● For Motor / Encoder / Electromagnetic Brake

| Length L [m (ft.)] | Product Name |
|--------------------|------------------|
| 1 (3.3) | CC010VXFB |
| 2 (6.6) | CC020VXFB |
| 3 (9.8) | CC030VXFB |
| 5 (16.4) | CC050VXFB |
| 7 (23) | CC070VXFB |
| 10 (32.8) | CC100VXFB |
| 15 (49.2) | CC150VXFB |
| 20 (65.6) | CC200VXFB |

◇ Flexible Connection Cable Sets

· For Motor / Encoder



● For Motor / Encoder

| Length L [m (ft.)] | Product Name |
|--------------------|-----------------|
| 1 (3.3) | CC010VXR |
| 2 (6.6) | CC020VXR |
| 3 (9.8) | CC030VXR |
| 5 (16.4) | CC050VXR |
| 7 (23) | CC070VXR |
| 10 (32.8) | CC100VXR |
| 15 (49.2) | CC150VXR |
| 20 (65.6) | CC200VXR |

· For Motor / Encoder / Electromagnetic Brake



● For Motor / Encoder / Electromagnetic Brake


| Length L [m (ft.)] | Product Name |
|--------------------|------------------|
| 1 (3.3) | CC010VXRB |
| 2 (6.6) | CC020VXRB |
| 3 (9.8) | CC030VXRB |
| 5 (16.4) | CC050VXRB |
| 7 (23) | CC070VXRB |
| 10 (32.8) | CC100VXRB |
| 15 (49.2) | CC150VXRB |
| 20 (65.6) | CC200VXRB |

● Note on use of flexible cables → Page 26


● Note on use of flexible cables → Page 26

● Dimensions [Unit = mm (in.)]


◇ Cable for Motor

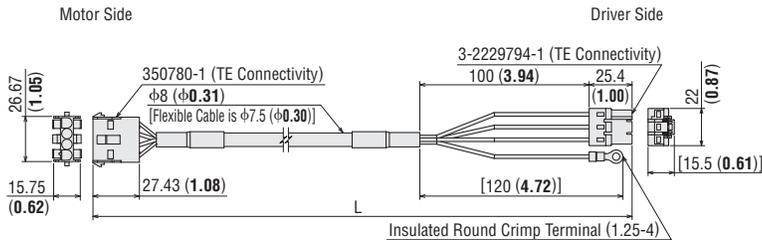

◇ Cable for Encoder

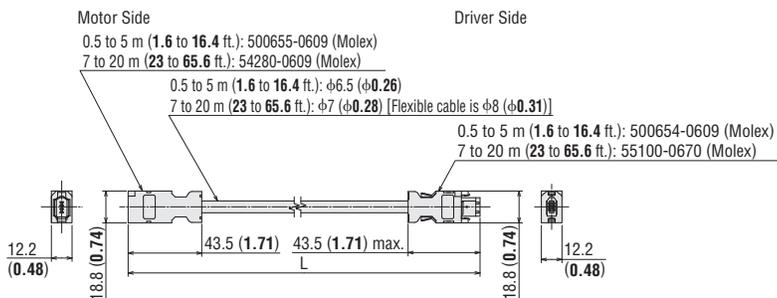

◇ Cable for Electromagnetic Brake

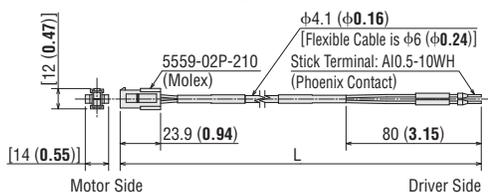

② Extension Cable Set - Motor Side / Flexible Extension Cable Set - Motor Side

This is a cable to extend the connection cable to the motor. When using an extension, the total length of the cable must be less than 20 m (65.6 ft.).

Use the flexible extension cable set in applications where the cable is bent and flexed repeatedly.

● Product Line

◇ Extension Cable Sets

· For Motor / Encoder



● For Motor / Encoder

| Length L [m (ft.)] | Product Name |
|--------------------|------------------|
| 1 (3.3) | CC010VXFT |
| 2 (6.6) | CC020VXFT |
| 3 (9.8) | CC030VXFT |
| 5 (16.4) | CC050VXFT |
| 7 (23) | CC070VXFT |
| 10 (32.8) | CC100VXFT |
| 15 (49.2) | CC150VXFT |

· For Motor / Encoder / Electromagnetic Brake



● For Motor / Encoder / Electromagnetic Brake

| Length L [m (ft.)] | Product Name |
|--------------------|-------------------|
| 1 (3.3) | CC010VXFBT |
| 2 (6.6) | CC020VXFBT |
| 3 (9.8) | CC030VXFBT |
| 5 (16.4) | CC050VXFBT |
| 7 (23) | CC070VXFBT |
| 10 (32.8) | CC100VXFBT |
| 15 (49.2) | CC150VXFBT |

◇ Flexible Extension Cable Sets

· For Motor / Encoder



● For Motor / Encoder

| Length L [m (ft.)] | Product Name |
|--------------------|------------------|
| 1 (3.3) | CC010VXRT |
| 2 (6.6) | CC020VXRT |
| 3 (9.8) | CC030VXRT |
| 5 (16.4) | CC050VXRT |
| 7 (23) | CC070VXRT |
| 10 (32.8) | CC100VXRT |
| 15 (49.2) | CC150VXRT |

· For Motor / Encoder / Electromagnetic Brake



● For Motor / Encoder / Electromagnetic Brake


| Length L [m (ft.)] | Product Name |
|--------------------|-------------------|
| 1 (3.3) | CC010VXRBT |
| 2 (6.6) | CC020VXRBT |
| 3 (9.8) | CC030VXRBT |
| 5 (16.4) | CC050VXRBT |
| 7 (23) | CC070VXRBT |
| 10 (32.8) | CC100VXRBT |
| 15 (49.2) | CC150VXRBT |

● Note on use of flexible cables → Page 26


● Note on use of flexible cables → Page 26

● Dimensions [Unit = mm (in.)]


◇ Cable for Motor

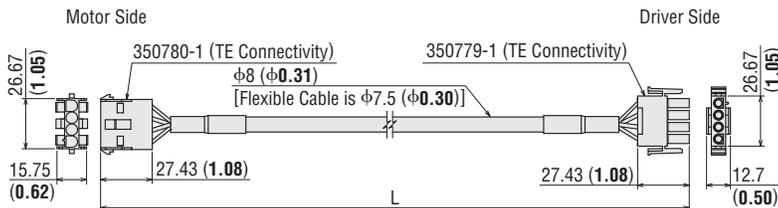


◇ Cable for Encoder

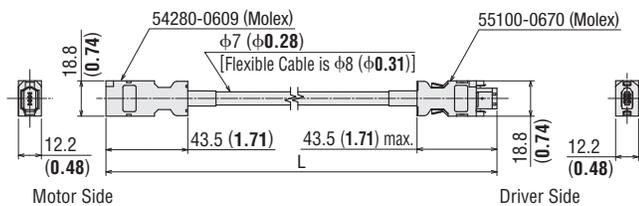

◇ Cable for Electromagnetic Brake

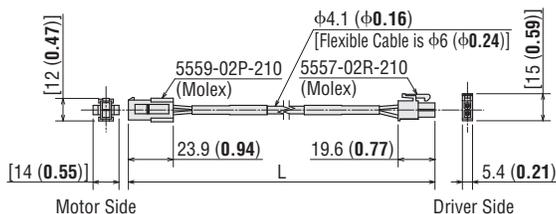

Cable for I/O Signals

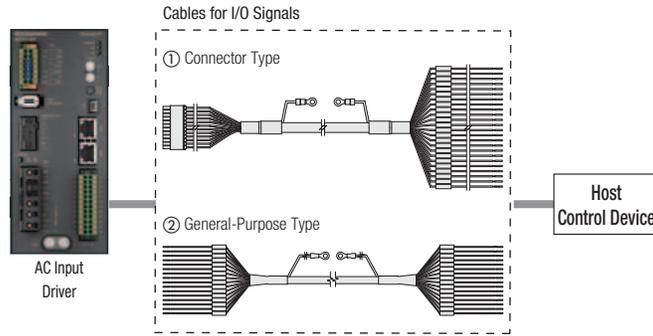

① Connector-Coupled Type


- Multi-core shielded cable
- Unbundled wires on one end
- Easy shield grounding using ground wire with a round terminal



● Product Line

| Product Name | Length L [m (ft.)] | Number of Lead Wire Cores | AWG |
|--------------|--------------------|---------------------------|-----|
| CC24D005C-1 | 0.5 (1.6) | 24 | 24 |
| CC24D010C-1 | 1 (3.3) | | |
| CC24D020C-1 | 2 (6.6) | | |

● Dimensions [Unit = mm (in.)]

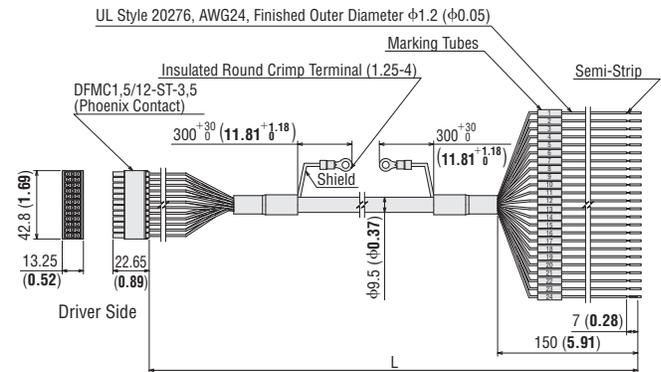

② General-Purpose Type


- Multi-core Shielded Cable
- Unbundled wires on both ends
- Easy shield grounding using ground wire with a round terminal
- The number of lead wire cores can be selected to suit the functions that will be used



● Product Line

| Product Name | Length L [m (ft.)] | Number of Lead Wire Cores | Outer Diameter D [mm (in.)] | AWG |
|--------------|--------------------|---------------------------|-----------------------------|-----|
| CC06D005B-1 | 0.5 (1.6) | 6 | $\phi 5.4$ ($\phi 0.21$) | 24 |
| CC06D010B-1 | 1 (3.3) | | | |
| CC06D015B-1 | 1.5 (4.9) | | | |
| CC06D020B-1 | 2 (6.6) | | | |
| CC10D005B-1 | 0.5 (1.6) | 10 | $\phi 6.7$ ($\phi 0.26$) | |
| CC10D010B-1 | 1 (3.3) | | | |
| CC10D015B-1 | 1.5 (4.9) | | | |
| CC10D020B-1 | 2 (6.6) | | | |
| CC12D005B-1 | 0.5 (1.6) | 12 | $\phi 7.5$ ($\phi 0.30$) | |
| CC12D010B-1 | 1 (3.3) | | | |
| CC12D015B-1 | 1.5 (4.9) | | | |
| CC12D020B-1 | 2 (6.6) | | | |
| CC16D005B-1 | 0.5 (1.6) | 16 | $\phi 7.5$ ($\phi 0.30$) | |
| CC16D010B-1 | 1 (3.3) | | | |
| CC16D015B-1 | 1.5 (4.9) | | | |
| CC16D020B-1 | 2 (6.6) | | | |


● Dimensions [Unit = mm (in.)]

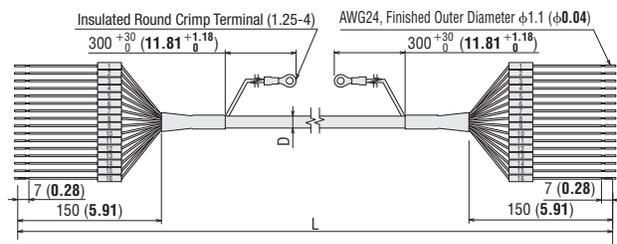

● The figure depicts 16 core wires.

Cables for DC Power Supplies

These cables are used to connect the driver and the DC power supply.

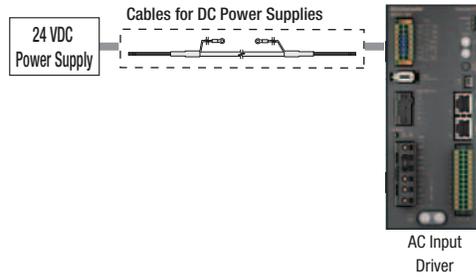


Product Line

| Product Name | Length L [m (ft.)] |
|-------------------|--------------------|
| CC02D005-3 | 0.5 (1.6) |
| CC02D010-3 | 1 (3.3) |
| CC02D015-3 | 1.5 (4.9) |
| CC02D020-3 | 2 (6.6) |
| CC02D050-3 | 5 (16.4) |



Dimensions [Unit = mm (in.)]

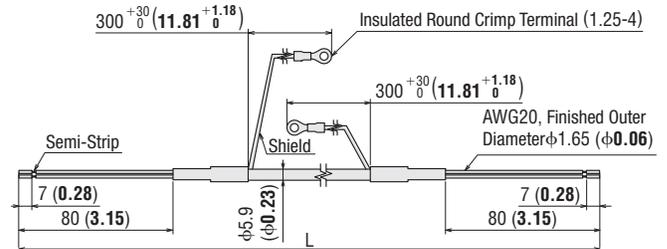

Note on Use of Cables

Note when Connecting the Connectors

When inserting or removing connectors, always hold the connector. Pulling on the cable may result in connection faults.

◇ When Inserting the Connector

Hold the connector body and insert as straight as possible. If the connector is angled while inserted, it may result in damage to the terminals or connection faults.

◇ When Removing the Connector


Disengage the connector's lock and pull straight out. If the connector is disengaged by pulling the cable, it may result in damage to the connector.

Notes on Routing of Flexible Cables

Do not bend the cable at the connector. This will apply stress to the connector and the terminal, and may result in connection faults or disconnections.


◇ Cable Fixing Method

Please fix in 2 locations to prevent movement of the connector.

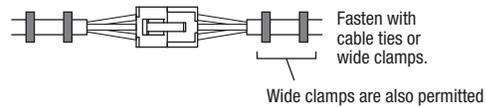

◇ Cable Routing Length and Bend Radius

When routing cables, use an appropriate length that prevents pulling when the cable is moved. The bend radius must be at least 6 times the cable diameter.

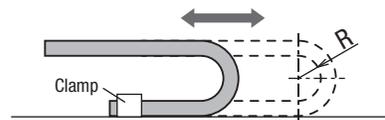

◇ Cable Interference

When routing cables inside a cable holder, ensure that the cables do not interfere with each other. This will apply stress to the connector and the terminal, and may result in premature disconnection. Please carefully check the cautions when using cable holders.

◇ Twisting of Cables

Route the cables so that they do not become twisted. Premature wire breaking may occur if they are bent while twisted. After routing the wires, use the markings on the surface of the cable to ensure that the cables are not twisted.

Peripheral Equipment

Regeneration Unit

The regenerative power generated by the motor may exceed the driver's regenerative power absorption capacity. In such case, a regeneration unit is connected to the driver to dissipate the regenerative power.

<Conditions in Which a Regeneration Unit is Likely Required>

- Vertical drive
- Acceleration or deceleration with an inertial load installed



Product Line

| Product Name |
|---------------|
| RGB200 |

Specifications

| Item | Description |
|---|---|
| Continuous Regenerative Power | 200 W (1/4 HP) |
| Resistance Value | 50 Ω |
| Thermal Protector Operating Temperature | Operation: 175±5°C (347±41°F) Return: 115±15°C (239±59°F) (Normally closed) |
| Thermal Protector Electrical Rating | 227 VAC 8 A 115 VAC 22 A |

- Install the regeneration unit in a place that has the same heat radiation capability as the heat sink (material: aluminum, 350×350 mm (13.8×13.8 in.), 3 mm (0.12 in.) thick).

Motor Mounting Brackets

Mounting brackets convenient for installing motors are available. Pilot holes on the motor are used to allow for snug mounting. Motor installation screws are included.

Product Line

● For PS Geared Type

| Product Name | Motor Frame Size | Applicable Product |
|----------------|------------------|--------------------|
| PLBW5PS | 90 mm (3.54 in.) | AZXM9 |



PLBW5PS

Connector Cover

<Application Example>

This is a resin cover for protecting and securing the connected connector part of the cable.

- Protection level equivalent to IP20
- It can be installed after connecting the motors and drivers.
- It is a structure to secure cables and protect lead wires.
- It can be attached to the equipment using two mounting holes [φ4.5 (φ0.18)].



Product Line

Material: Polyamide

| Product Name |
|----------------|
| MAC-D* |
| MAC-D02 |

*Excluding encoder cable and motor cable

Specifications are subject to change without notice. This catalog was published in December 2023.

ORIENTAL MOTOR U.S.A. CORP.

Western Sales and Customer Service Center

Tel: (310) 715-3301 Fax: (310) 225-2594

Los Angeles

Tel: (310) 715-3301

San Jose

Tel: (408) 392-9735

Midwest Sales and Customer Service Center

Tel: (847) 871-5900 Fax: (847) 472-2623

Chicago

Tel: (847) 871-5900

Eastern Sales and Customer Service Center

Tel: (781) 848-2426 Fax: (781) 848-2617

Boston

Tel: (781) 848-2426

Toronto

Tel: (905) 502-5333

Technical Support

Tel: (800) 468-3982 / 8:30 A.M. to 5:00 P.M., P.S.T. (M-F)
7:30 A.M. to 5:00 P.M., C.S.T. (M-F)

E-mail: techsupport@orientalmotor.com

**Obtain Specifications, Online Training
and Purchase Products at:**
www.orientalmotor.com