

REVISIONS

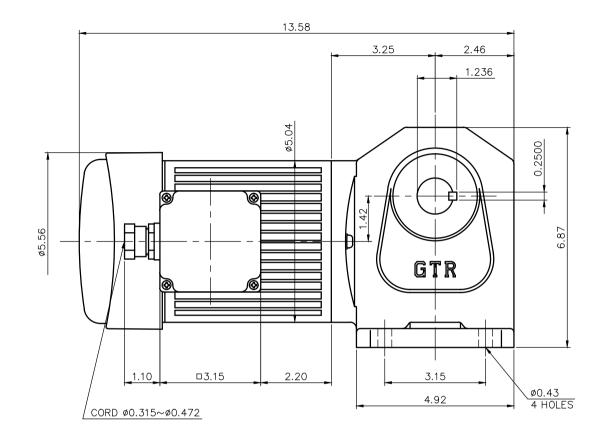

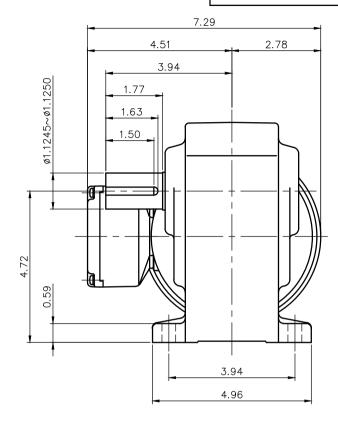

NOTE: THE ATTACHED RECTIFIER IS USED FOR DC POWER SUPPLY TO THE BRAKE COIL.

BRAKE SPECIFICATION

TYPE	BS3-04-180
	SPRING CLOSE
INPUT VOLTAGE	DC 207V
POWER CONSUMPTION	22 W (at 75°)
BRAKE TORQUE	27.8 in-lbs

MOTOR SPECIFICATION

TYPE	3-PHASE INDUCTION MOTOR
FORM	TOTALLY ENCLOSED FAN COOLED
OUT PUT	1/2 HP
VOLTAGE	208/230/460/400 V
FREQ.	60/60/60/50 Hz
POLES	4
ROTATIONAL FREQUENCY	1800/1800/1800/1500 rpm
RATING	S1 CONT.
INS.CLASS	F

REDUCER SPECIFICATION

TYPE	GTR
FORM	28R
	1/5 1/10 1/15 1/20
RATIO	1/25 1/30 1/40 1/50
	1/60
LUBRICATION	GREASE

NOTE: THE BRAKE LEADS ARE PULLED INTO THE TERMINAL BOX.

NOTE: THIS MOTOR IS AFFIXED WITH CE MARKING. NOTE: THE GROUND LEAD SHOULD BE LONGER THAN

THE SUPPLY LEAD FOR THE MOTOR.

NOTE: THIS MOTOR IS UL CERTIFIED MODEL.(UL1004-1)

NOTE: UL-LISTED MODEL NAME: MF4AEB4

TITLE	H2L28R5~60-MF4AEB4							
DIMENSION OF MODEL								
DRAWING NO. H2L28R-MF4AEB4								
USER								
NOTICE								
APPROVE	Y.lkeda		SCALE	А	$\overline{\Box}$	UNIT	DATE	
CHECK	M.li jima		1/3	Ψ	<u> </u>	in	2015.07.15	
DESIGN	Y.Miura		'/ 3	NIS	SEI	CORPOR	RATION	