

REVISIONS

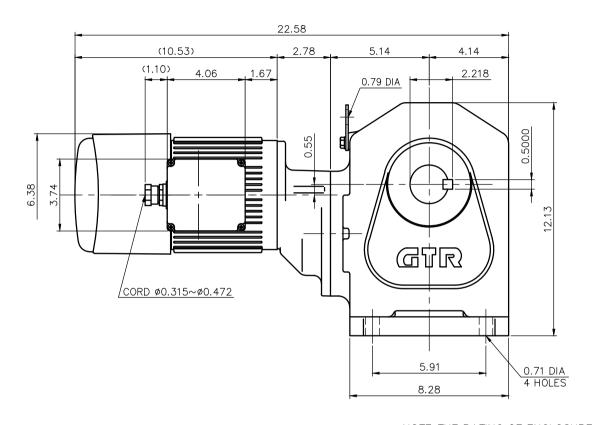

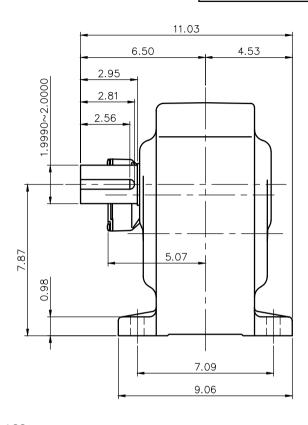

NOTE: THE RATING OF ENCLOSURE CLASS: IP65 (EN60034-5) EQUIVALENT.

NOTE: THE ATTACHED RECTIFIER IS USED FOR

DC POWER SUPPLY TO THE BRAKE COIL.

NOTE: THE BRAKE LEADS ARE PULLED INTO

THE TERMINAL BOX.

## BRAKE SPECIFICATION

TYPE	BSV-08U-180
BRAKE TYPE	SPRING CLOSE
INPUT VOLTAGE	DC 207V
POWER CONSUMPTION	33 W (at 75°C)
BRAKE TORQUE	52.0 in-lbs

## MOTOR SPECIFICATION

3-PHASE INDUCTION MOTOR
TOTALLY ENCLOSED FAN COOLED
3/4 HP
208/230/460/400 V
60/60/60/50 Hz
4
1800/1800/1800/1500 rpm
S1 CONT.
F

## REDUCER SPECIFICATION

TYPE	GTR
FORM	50М
RATIO	1/300 1/375 1/450
LUBRICATION	GREASE

NOTE: OUTPUT SHAFT AND KEY MATERIAL: SUS420J2 NOTE: THIS MOTOR IS AFFIXED WITH CE MARKING. NOTE: THE GROUND LEAD SHOULD BE LONGER THAN THE SUPPLY LEAD FOR THE MOTOR.

NOTE: THIS MOTOR IS UL CERTIFIED MODEL.(UL1004-1)

NOTE: UL-LISTED MODEL NAME: WF5AWV4

TITLE H2L50M300~450-WF5AWV4								
DIMENSION OF MODEL								
DRAWING NO. H2L50M-WF5AWV4								
USER								
NOTICE								
APPROVE	Y.Ikeda	SCALE	фг	1	UNIT	DATE		
CHECK	Y.San ii	1/5	Ψ -	J	in	2016.10.16		
<b>—</b>	A.Kubota	1/3	NISSE	1	CORPOR	ATION		